

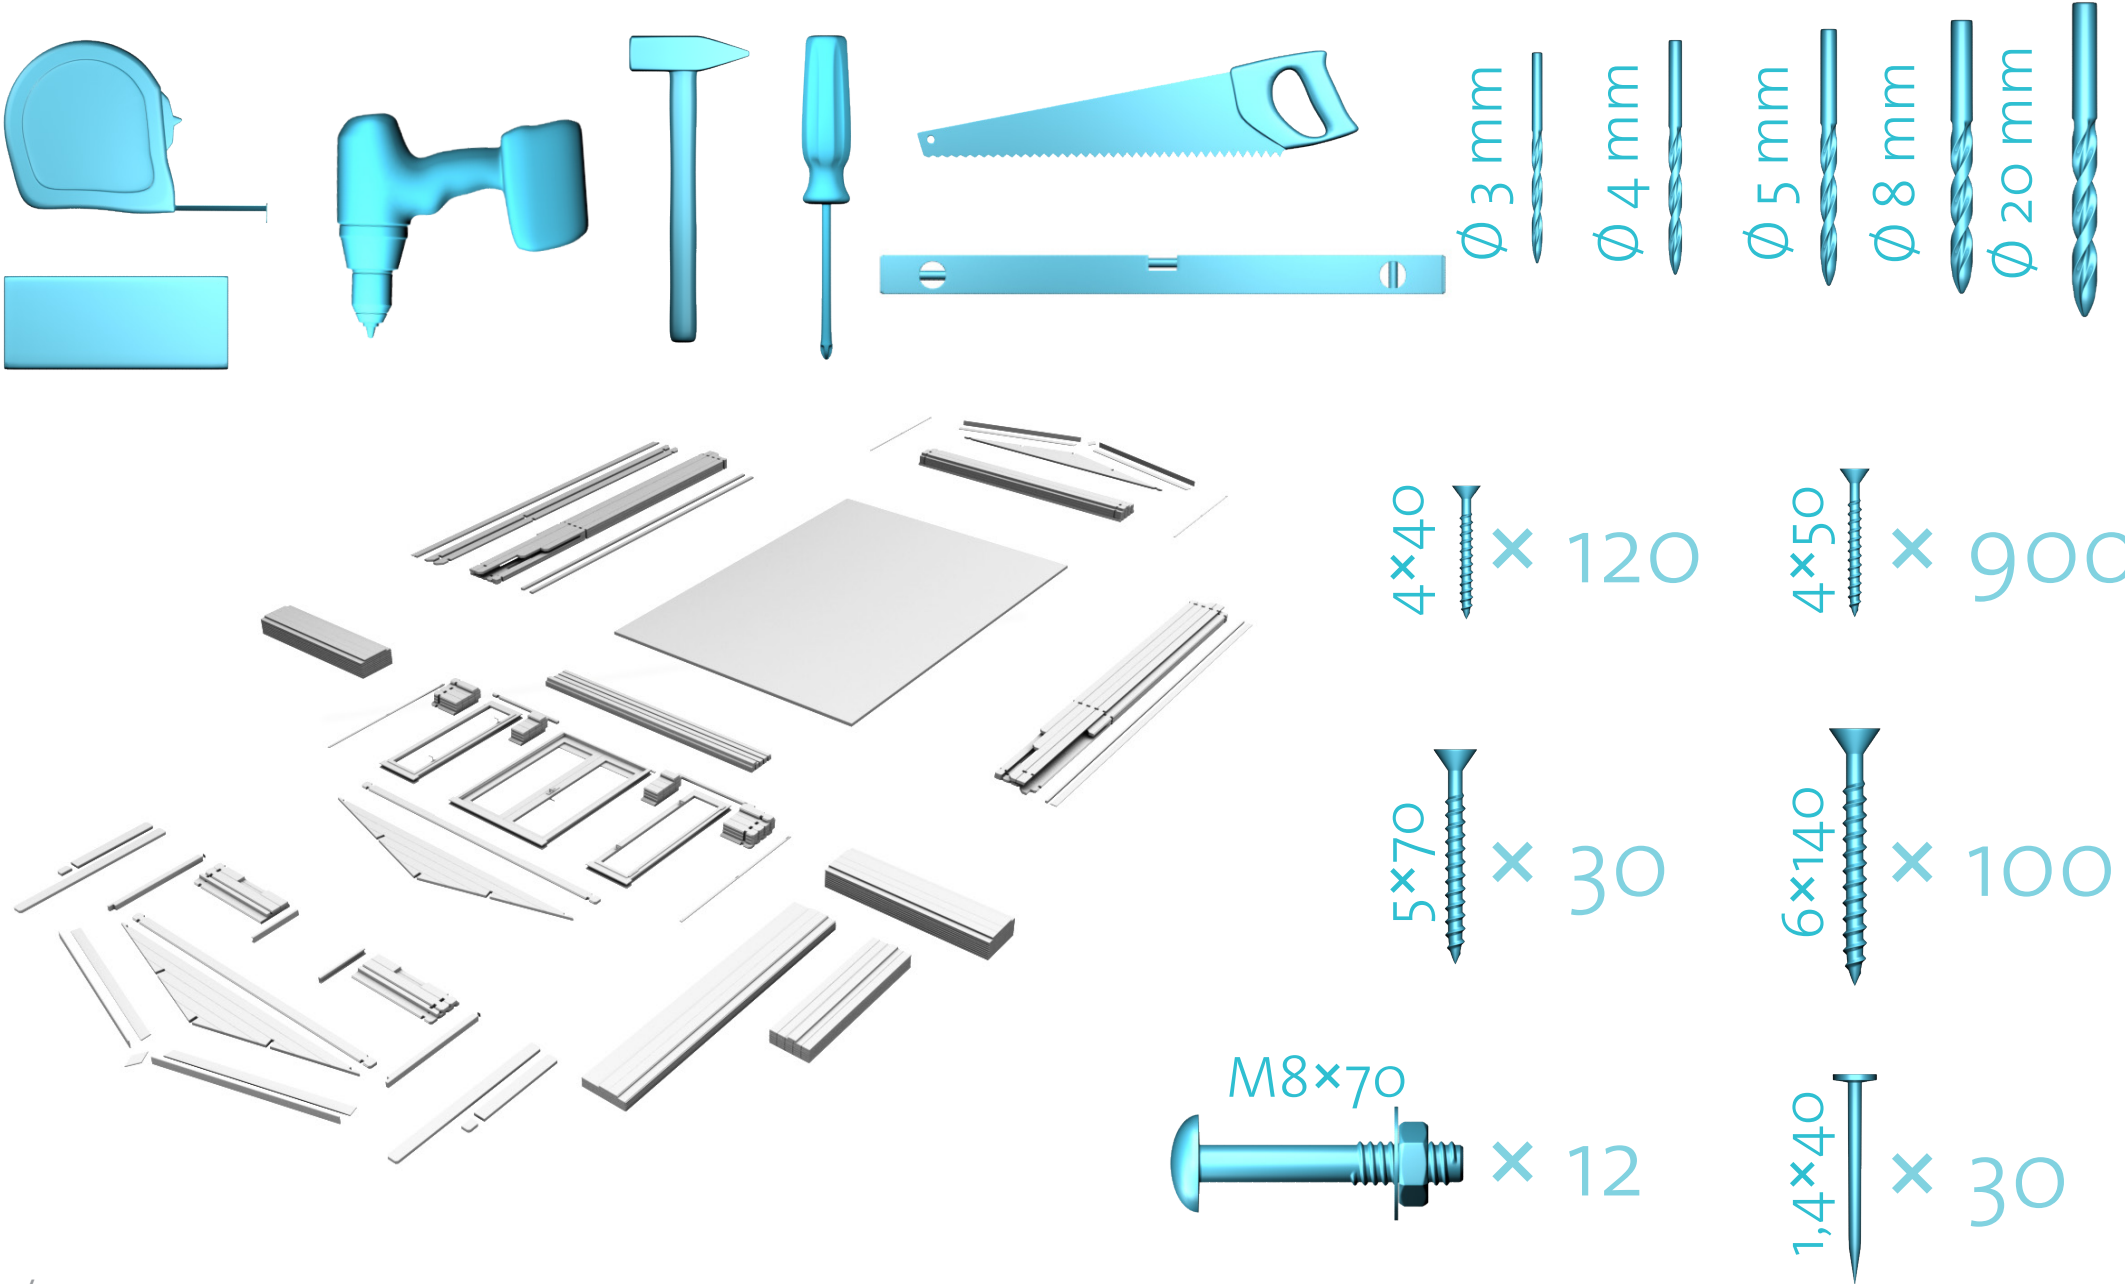


PREPARE THE GROUND, UNWRAP THE PACKAGE,
LAY OUT THE COMPONENTS, FIND THE TOOLS.



KOLDING 40

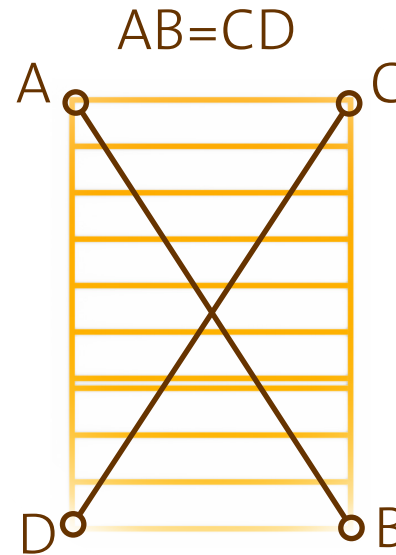

LAY OUT THE FOUNDATION BEAMS AND SQUARE IT BY MEASURING FROM CORNER TO CORNER.

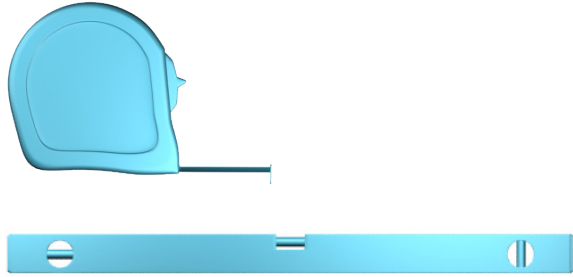

KOLDING 40

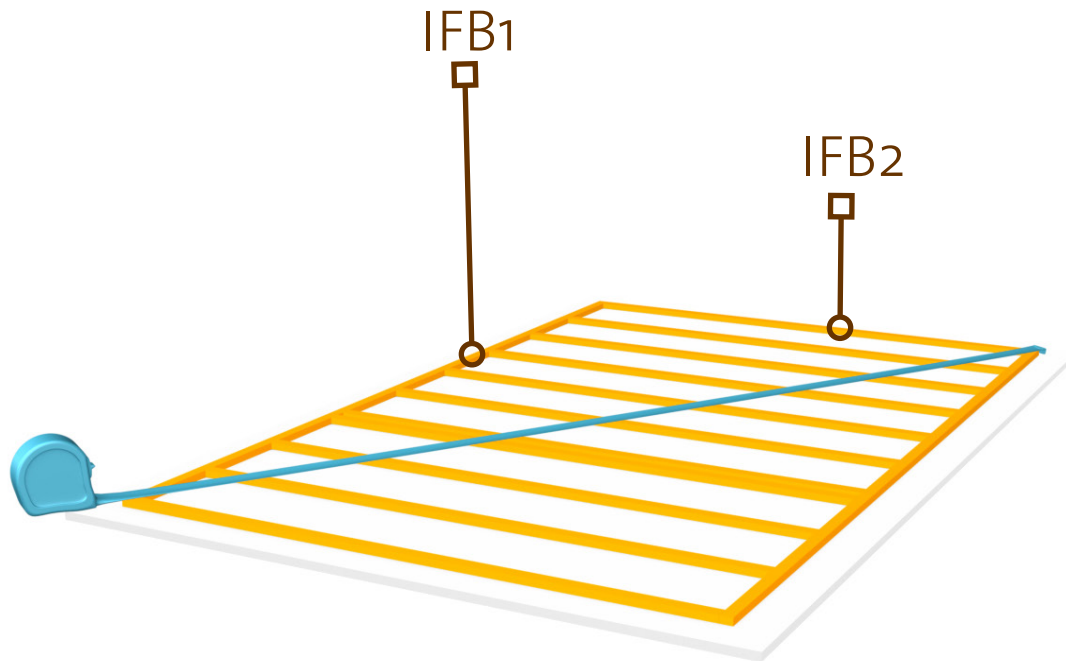
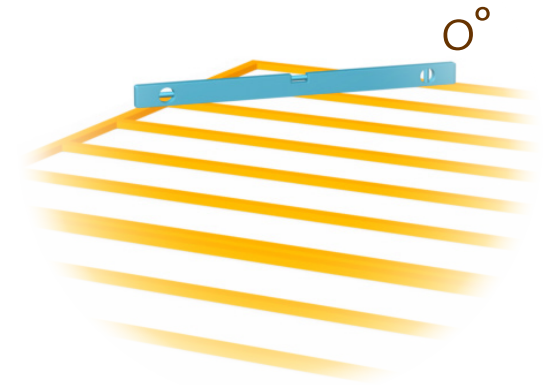


MAKE SURE THAT THE FOUNDATION IS INSTALLED ON A LEVEL SURFACE. CHECKING ALL DIRECTIONS, INCLUDING CORNER TO CORNER. 2%

ATTACH FOUNDATION BEAMS
WITH SCREWS.

KOLDING 40



6x140
× 22
Ø 5 mm

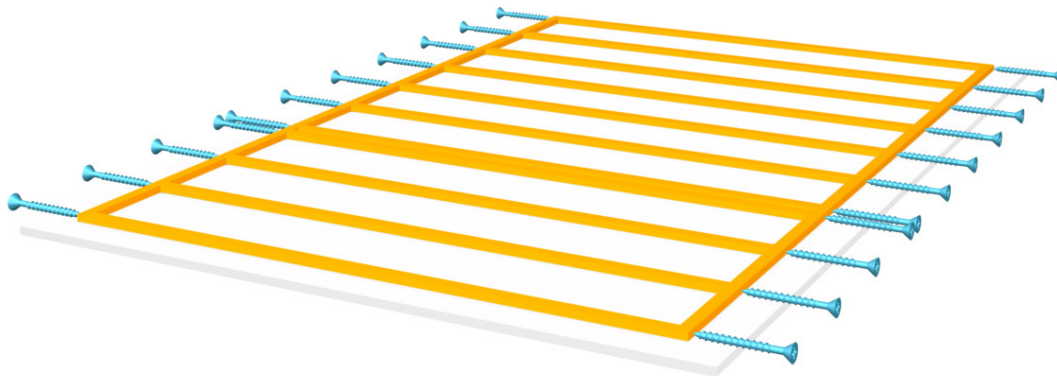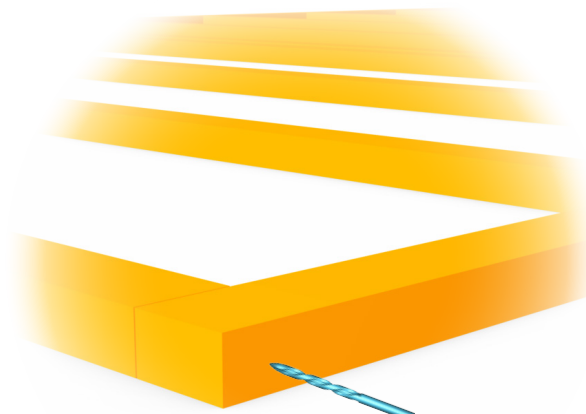

LAY OUT THE **BOTTOM** LOGS,
ATTACH TO THE FOUNDATION.

KOLDING 40

- 5x70 × 7
- 6x140 × 14
- Ø 4 mm
- Ø 5 mm

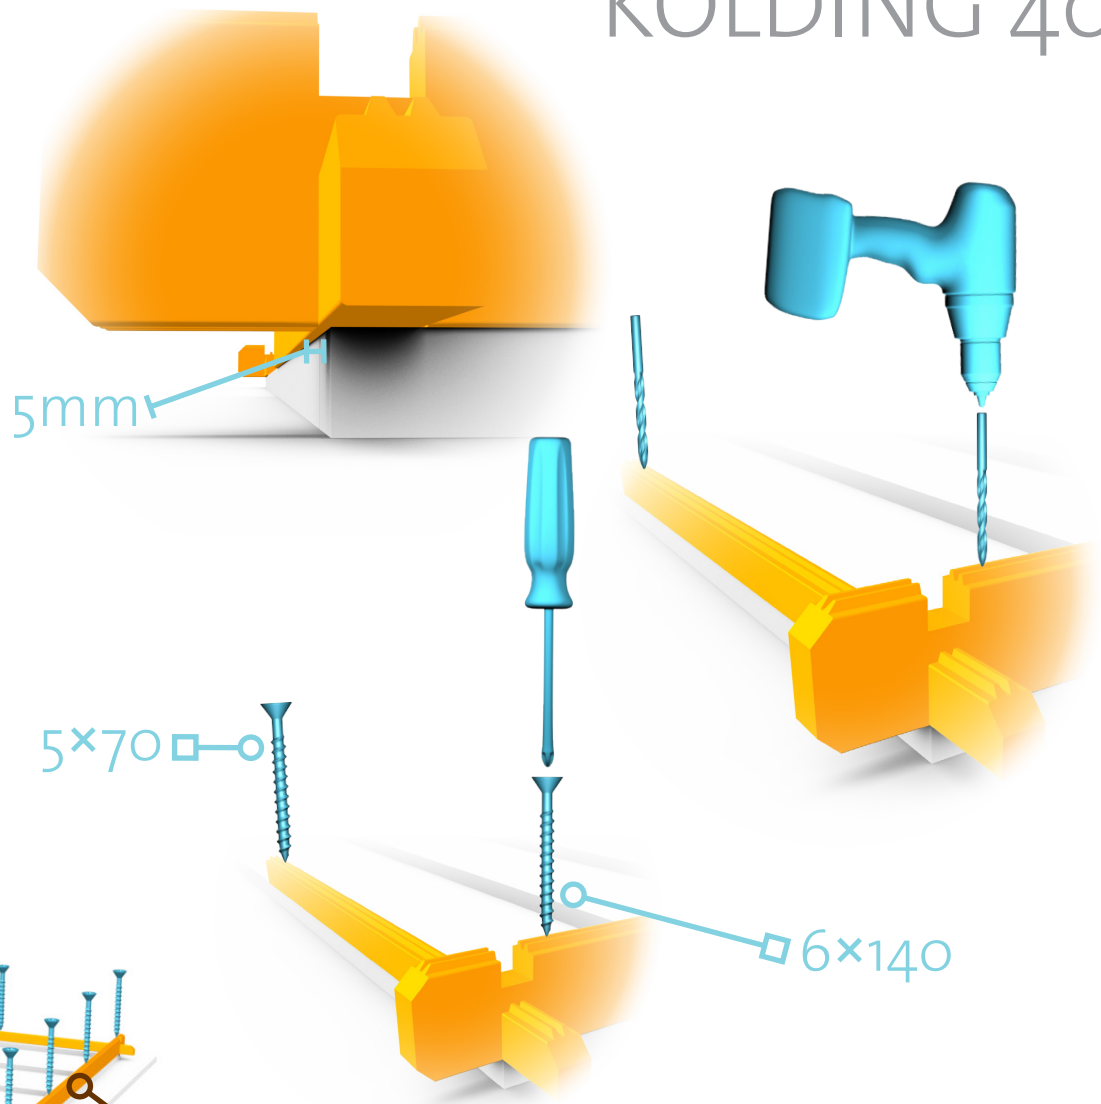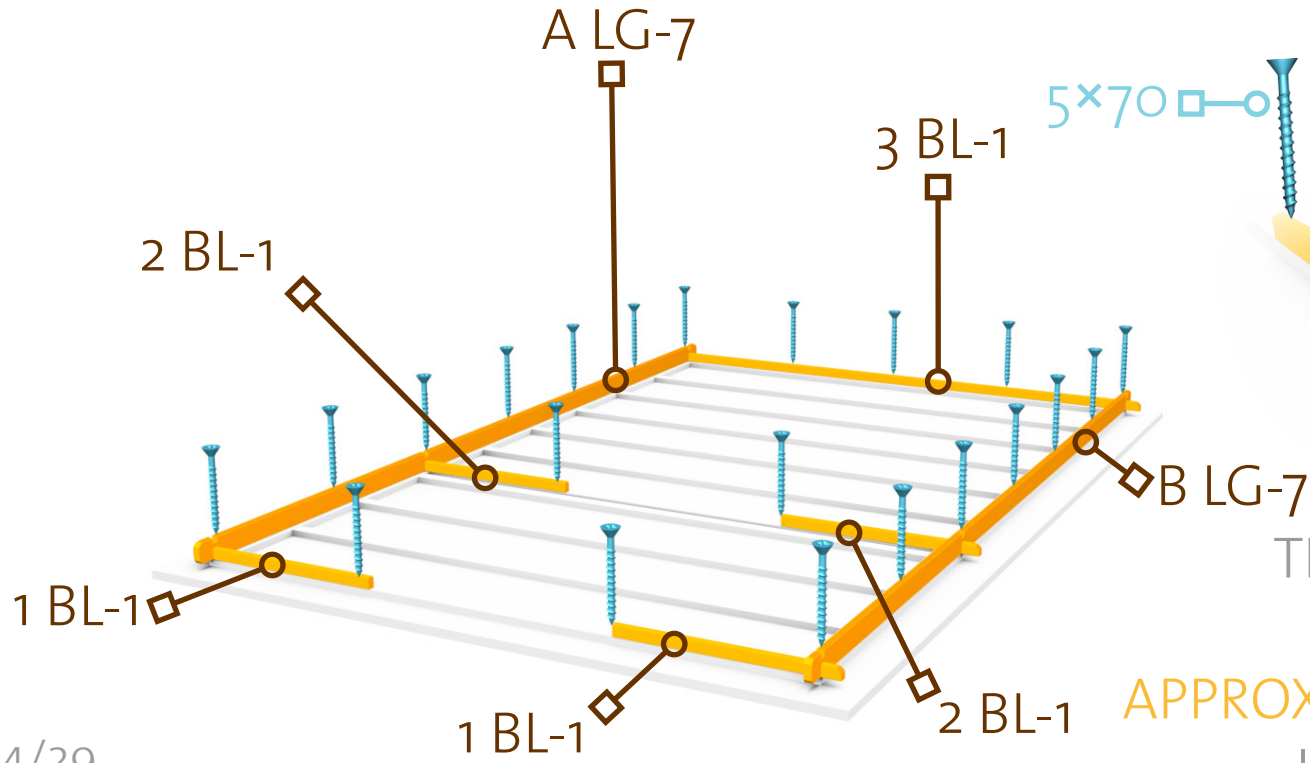

THE WALL **LOGS** WILL HANG OVER
THE FOUNDATION **BEAMS** BY
APPROXIMATELY 5MM. THIS OVERHANG
IS DESIGNED AS A RAIN DRIP. **5%**

ATTACH THE FIRST ROW OF
WALL LOGS INTO THE BOTTOM
LOGS WITH SCREWS.




- 5x70


×

6
- 6x140

×


11
- Ø 4 mm
- Ø 5 mm

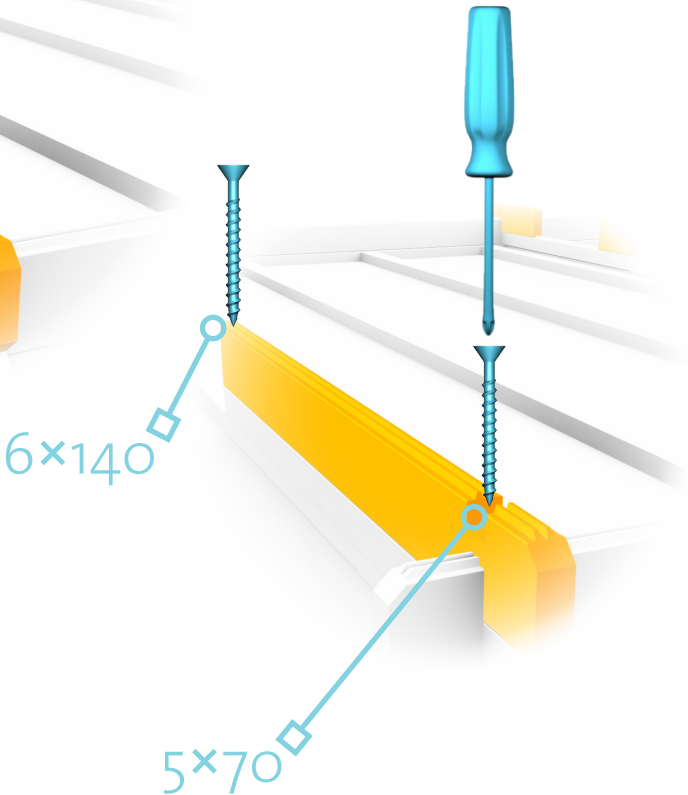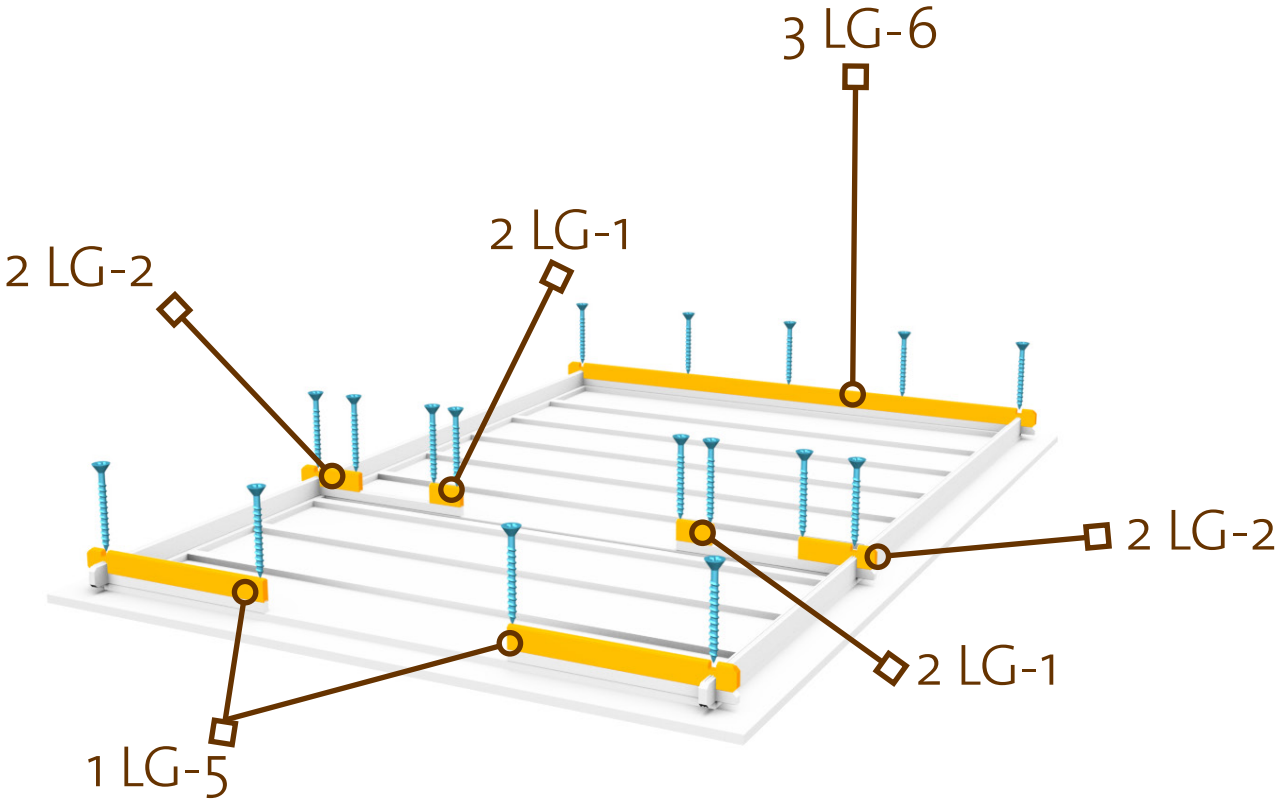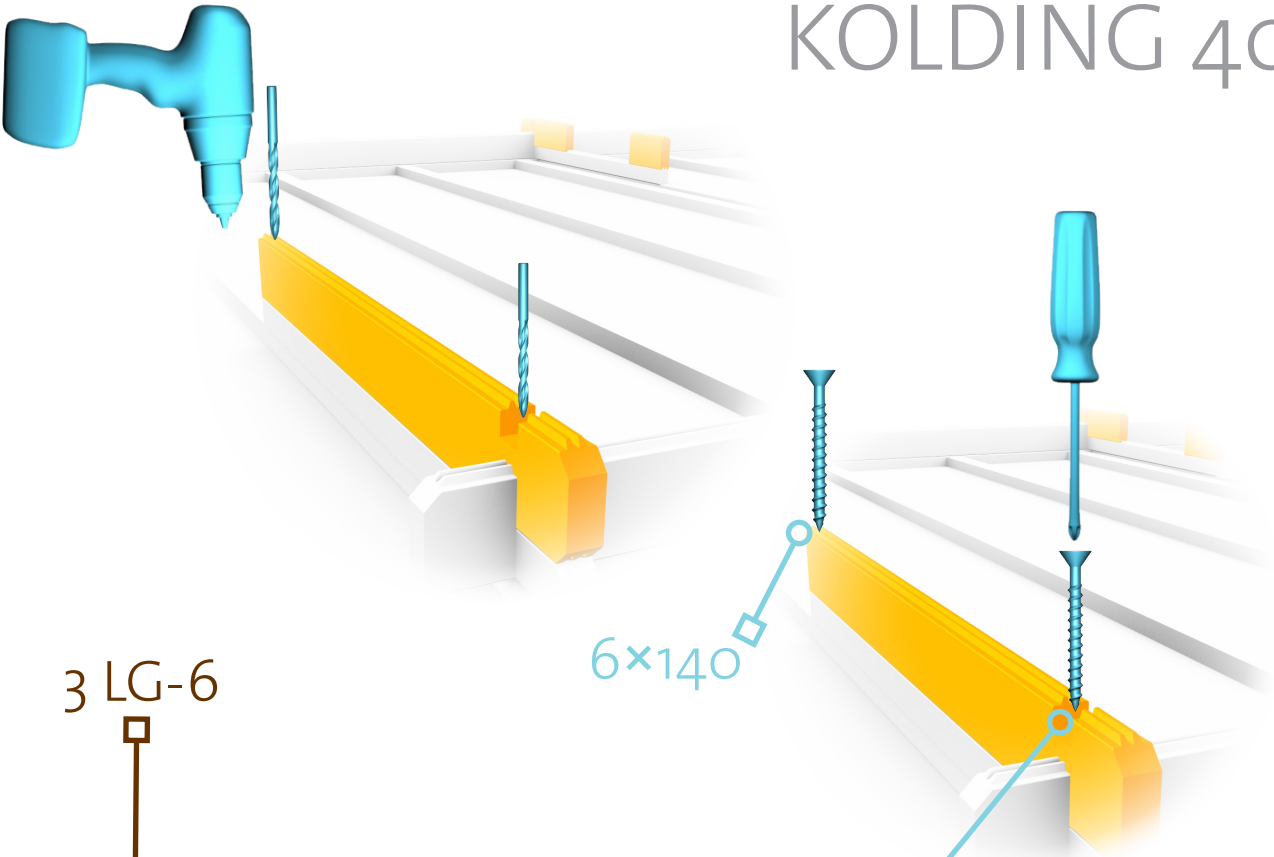

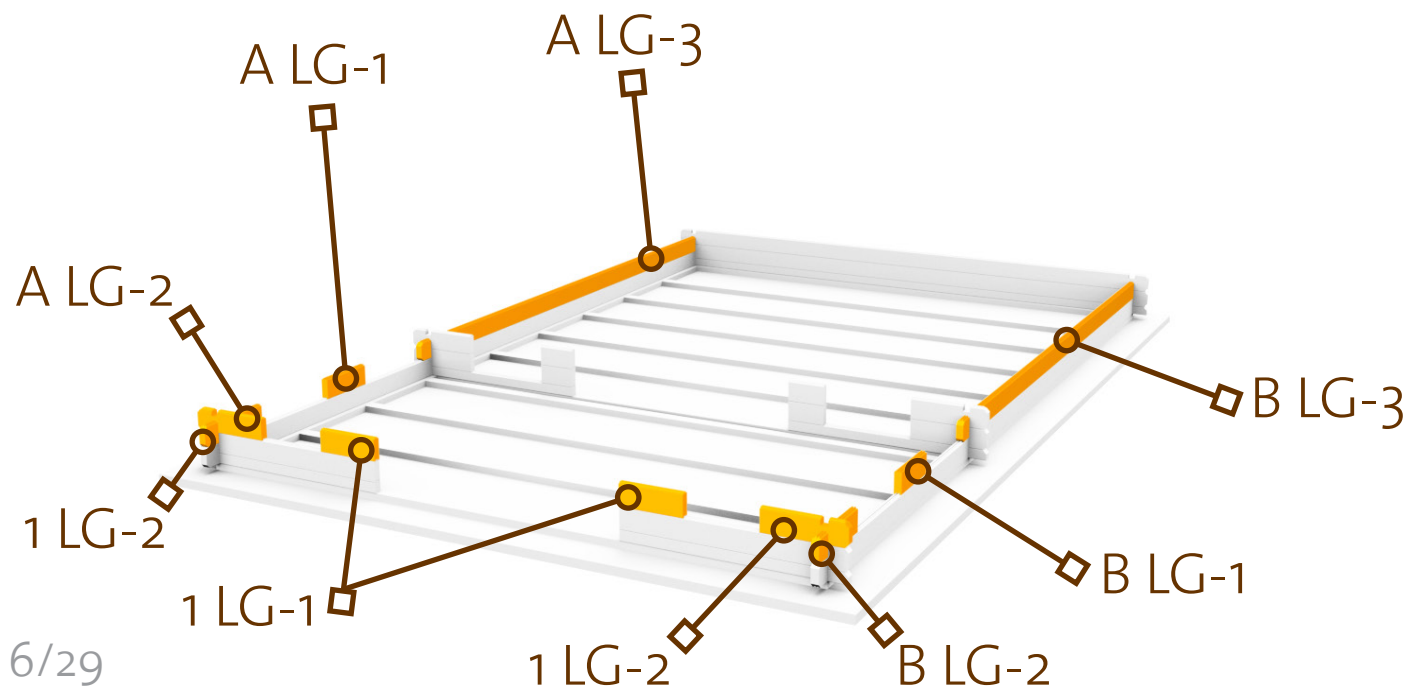




AFTER PLACING 3-4 ROWS OF WALL LOGS, TAP EACH WALL LOG IN PLACE USING A HAMMER AND THE HITBLOCK PROVIDED, TO TIGHTEN THE LOGS.

KOLDING 40

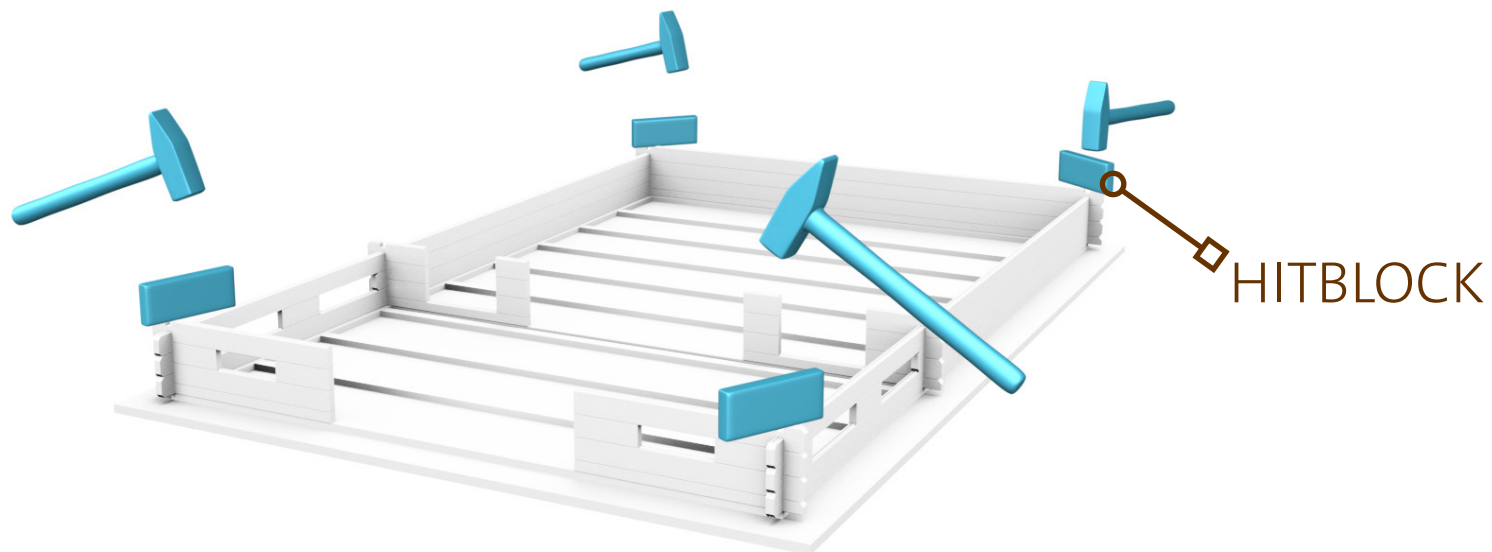


UNDER THE DOOR INSTALL THE
DOOR BEAM. SLIDE THE DOOR
IN, ATTACH THE HANDLE.

4x40
× 3

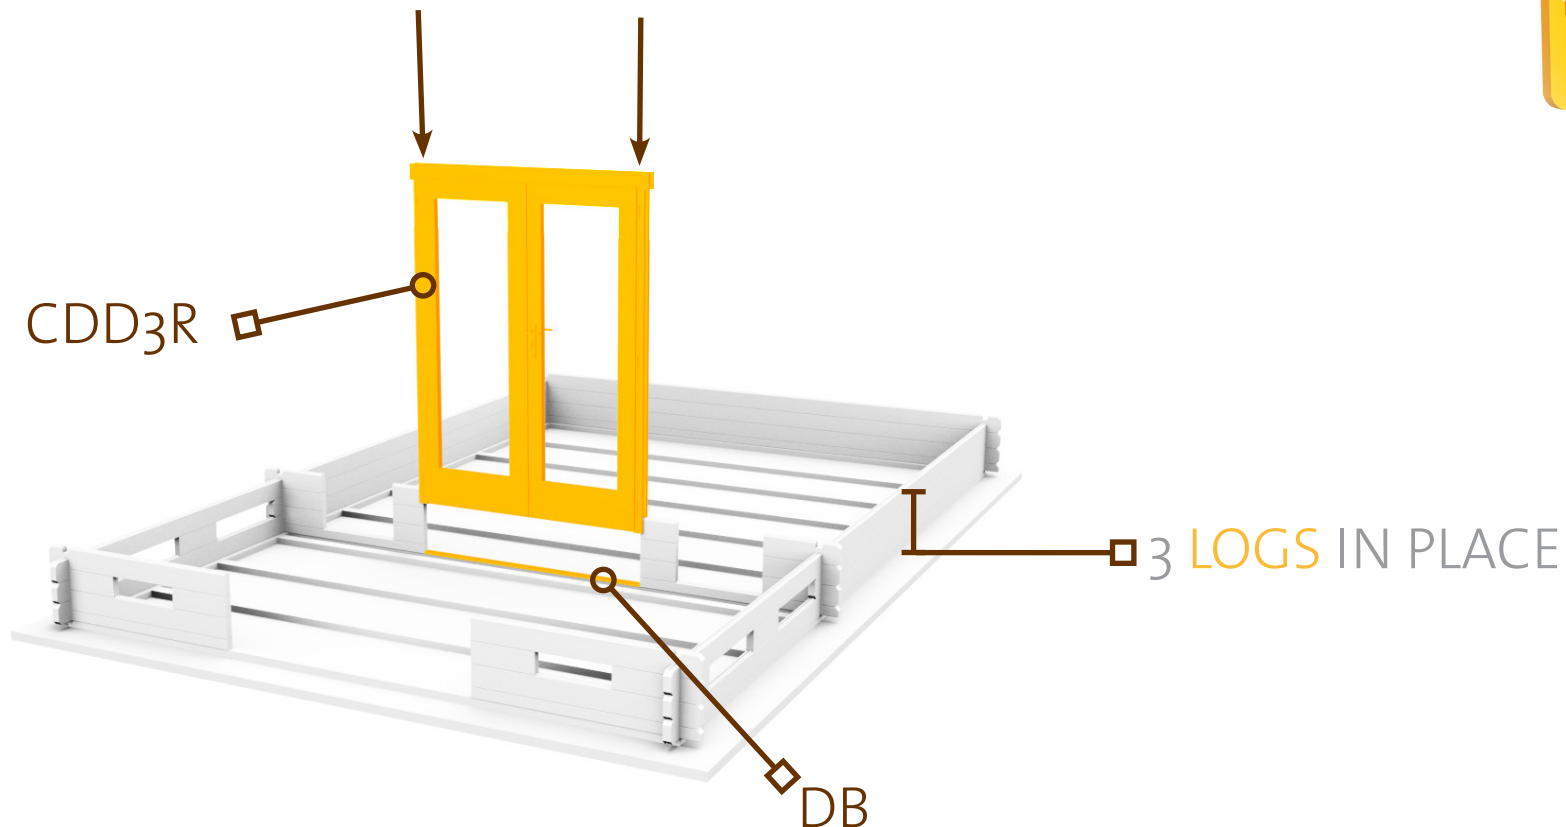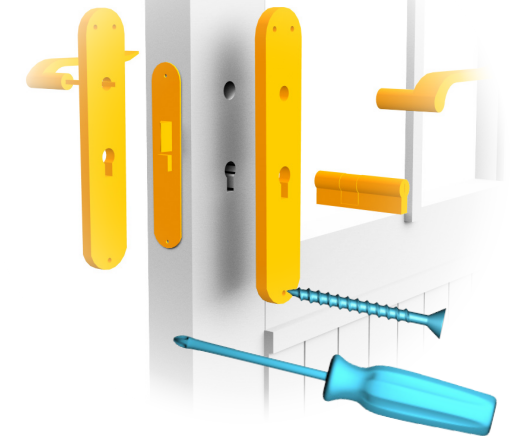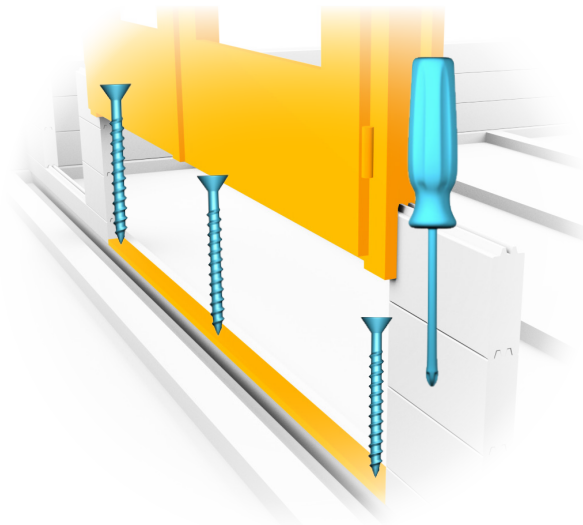


SLIDE THE **WINDOWS** IN,
ATTACH THE **HANDLES**.

KOLDING 40

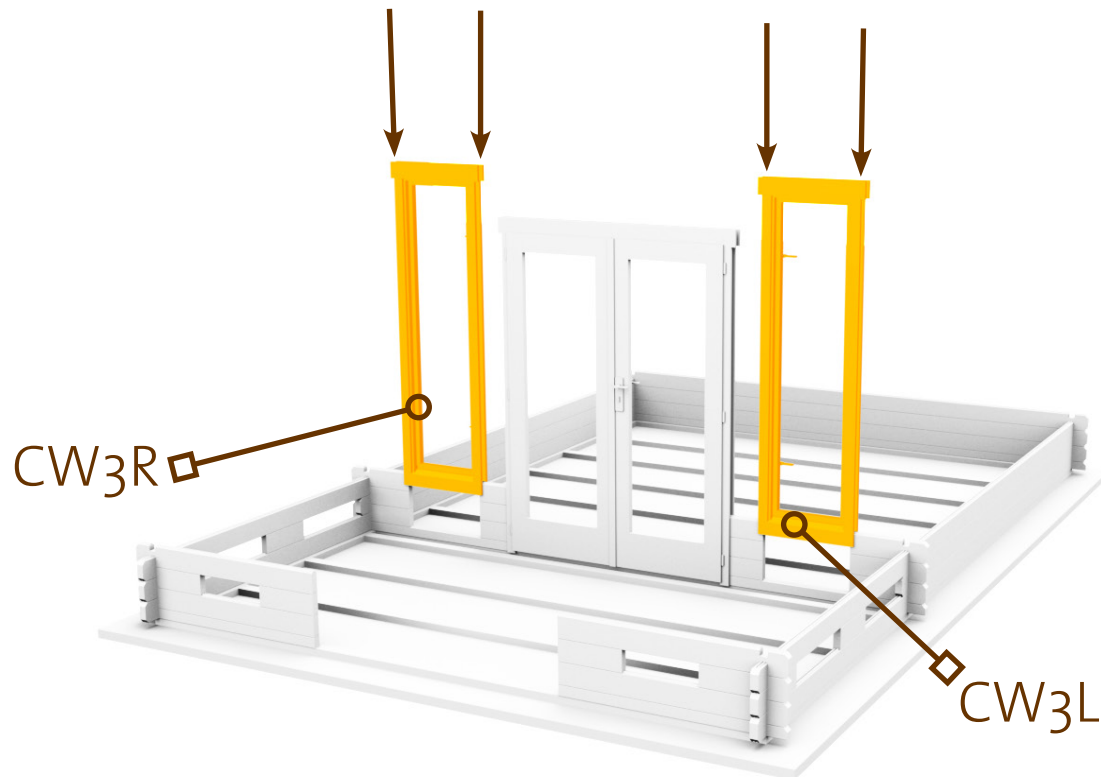




KOLDING 40

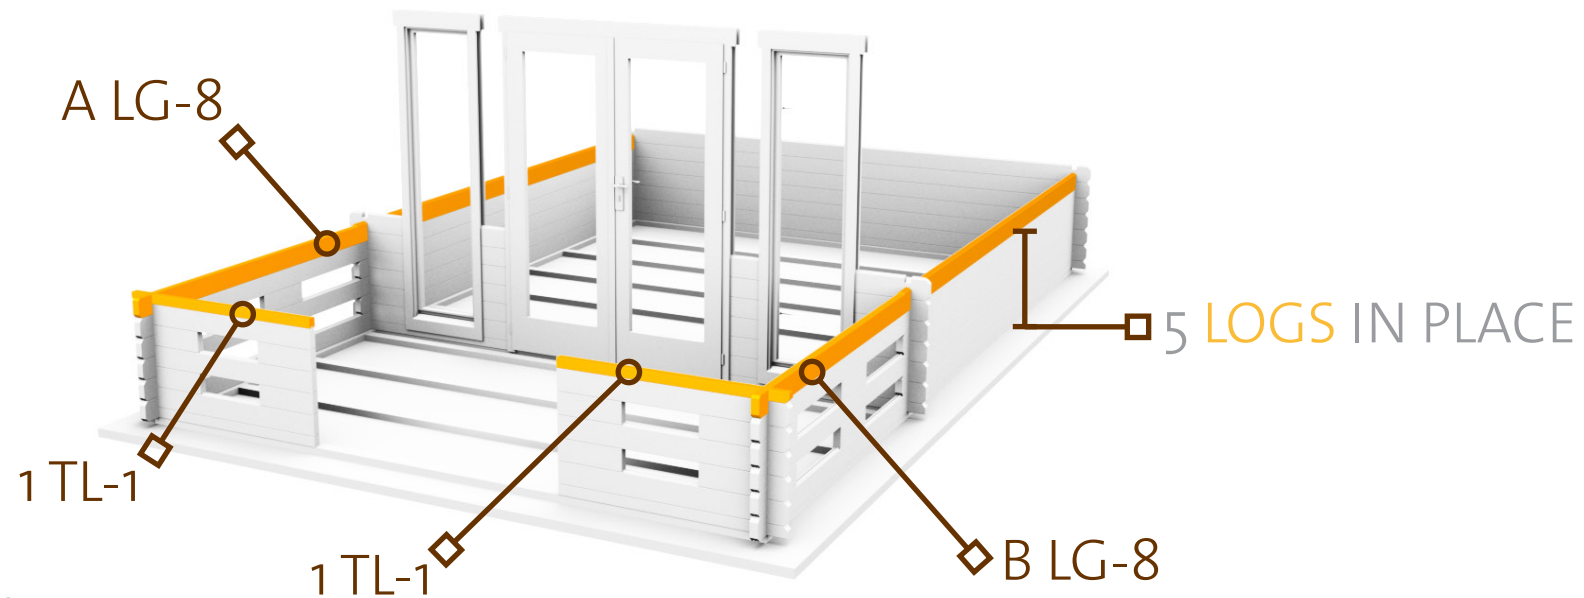

ATTACH THE HANDRAILS
WITH SCREWS.

6x140 × 26
Ø 5 mm



KOLDING 40

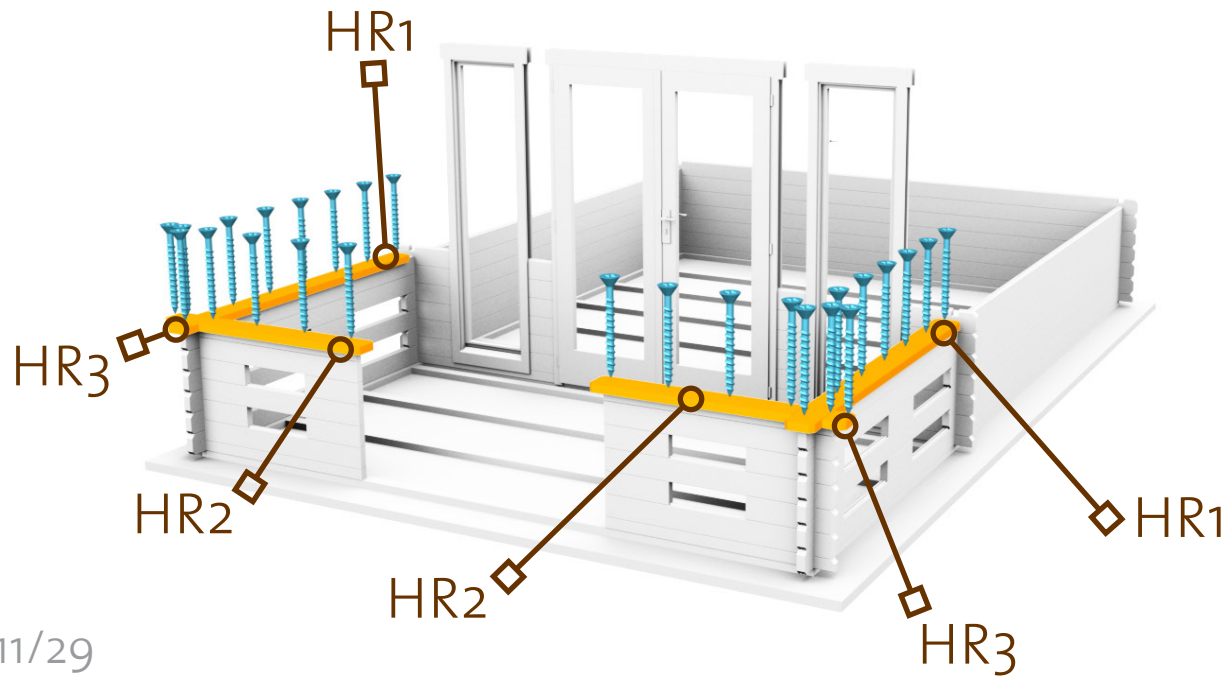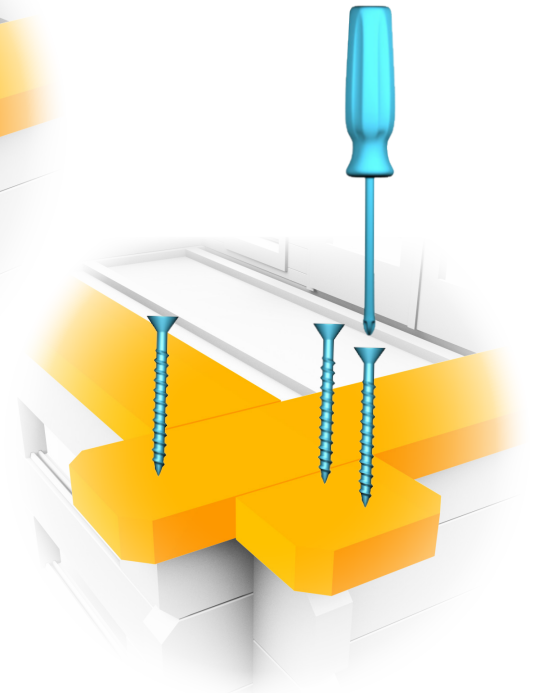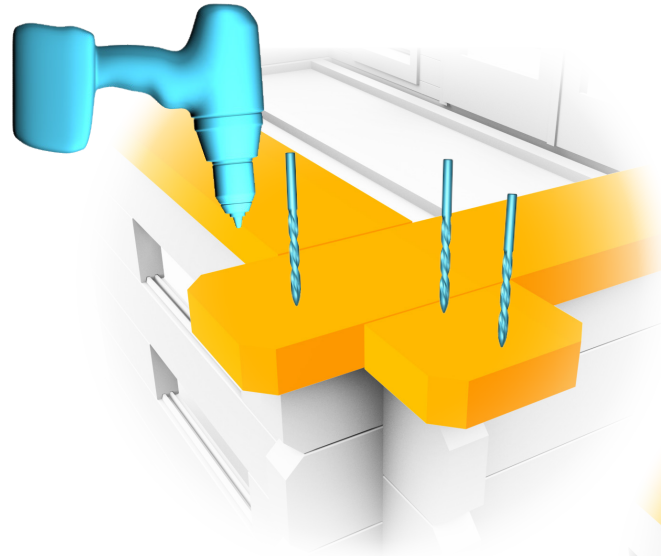


ATTACH THE U-PROFILE
WITH SCREWS.

5x70
× 6




Ø 4 mm

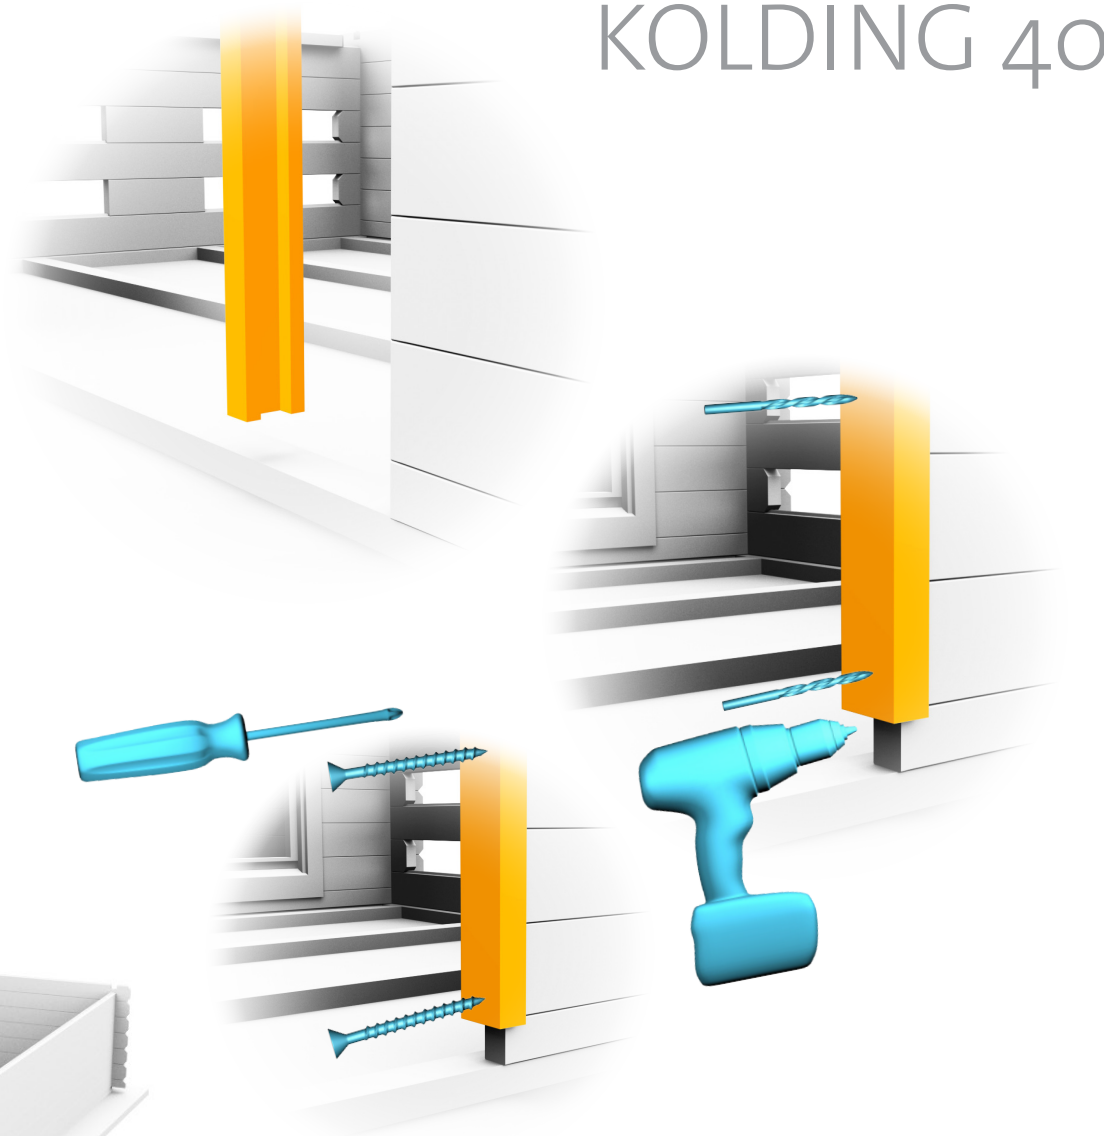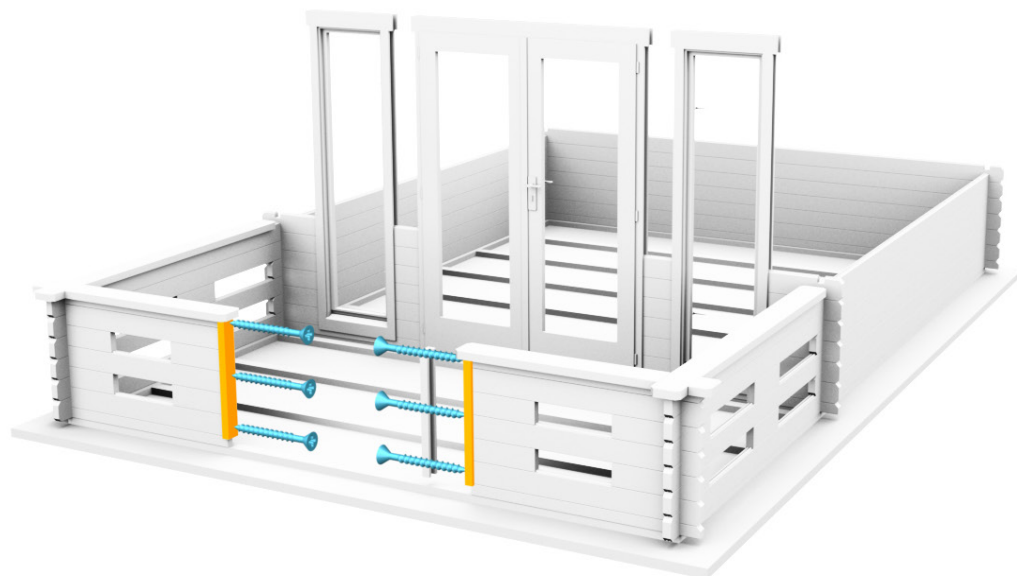

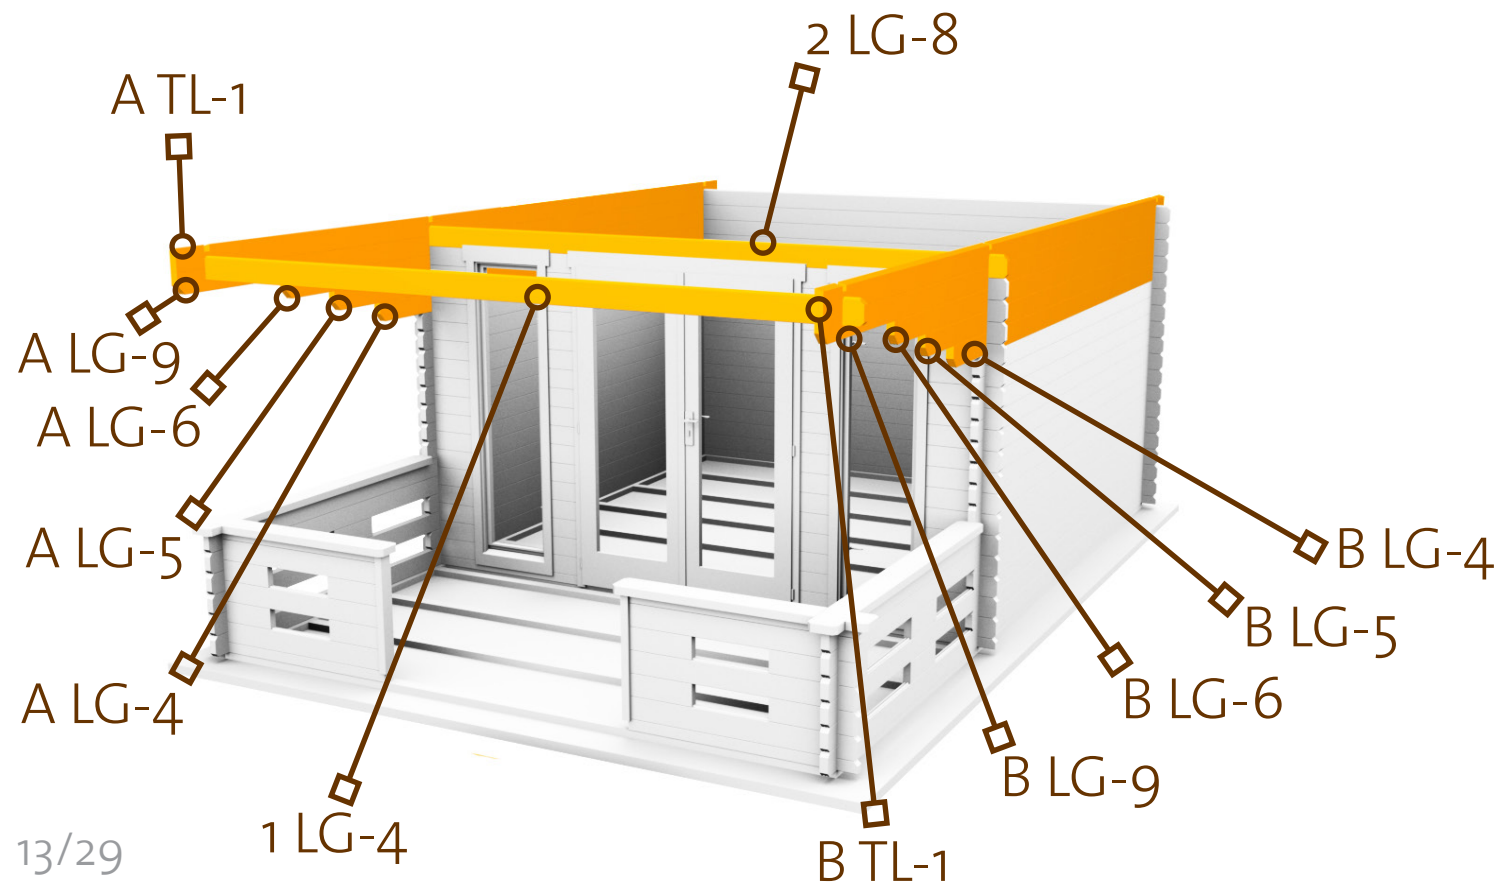

DRILL 20 MM HOLE IN THE MIDDLE OF THE COLUMNS BOTTOM. ATTACH COLUMNS FOOT WITH SCREWS.




KOLDING 40

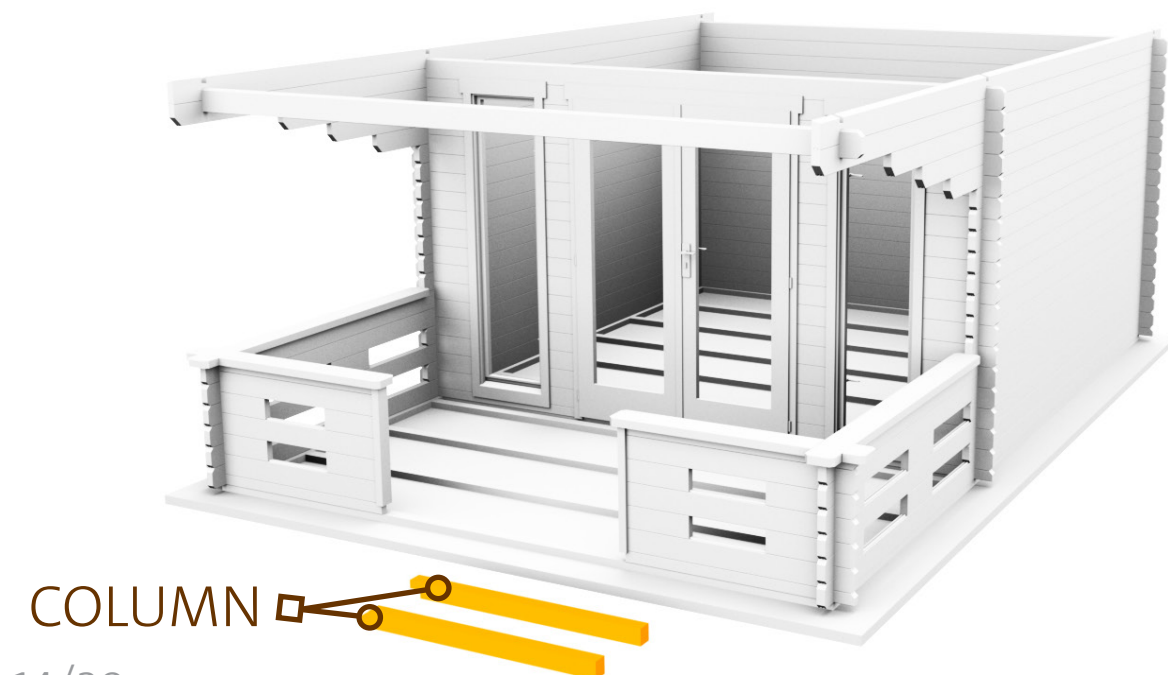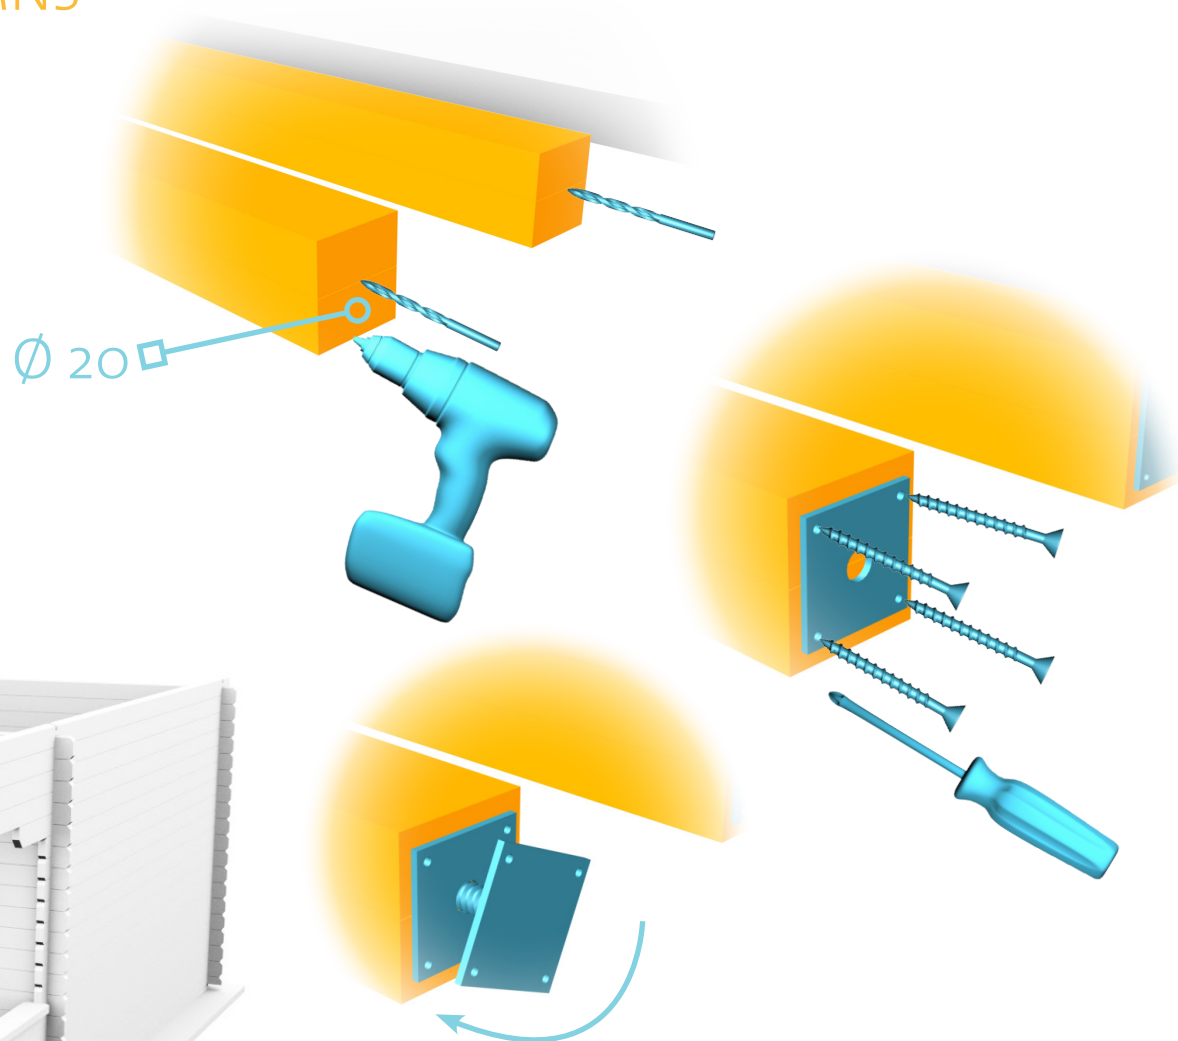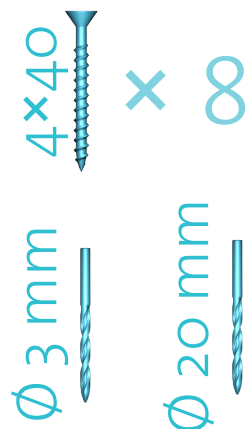

SCREW IN THE SECOND PART OF THE POSTFOOT. 38%



ATTACH THE **POSTS** TO THE WALL WITH
SCREWS. MAKE SURE THAT THEY **ARE** STRAIGHT.

KOLDING 40

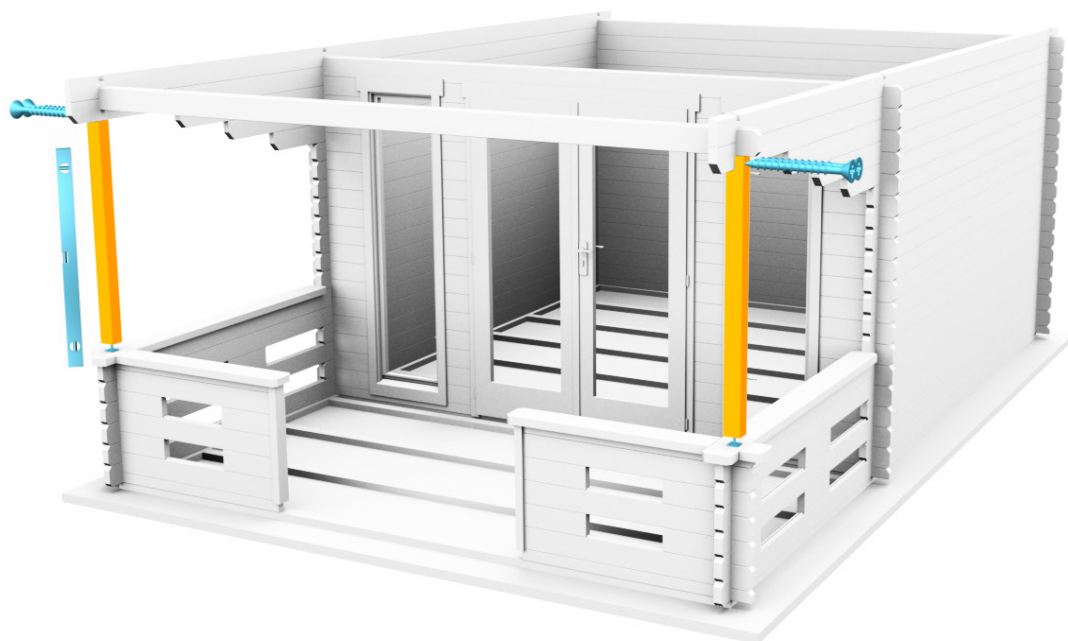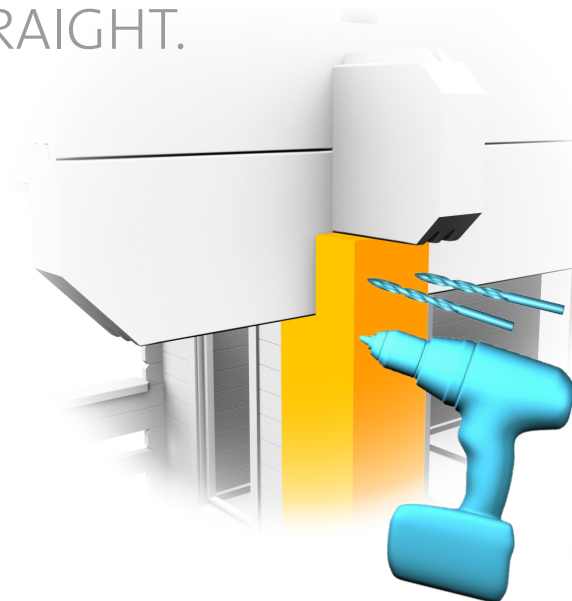

SCREW OUT THE SECOND PART
OF THE POST FOOT SO THAT IT TIGHTLY
TOUCHES THE HANDRAIL.

4x40
× 8

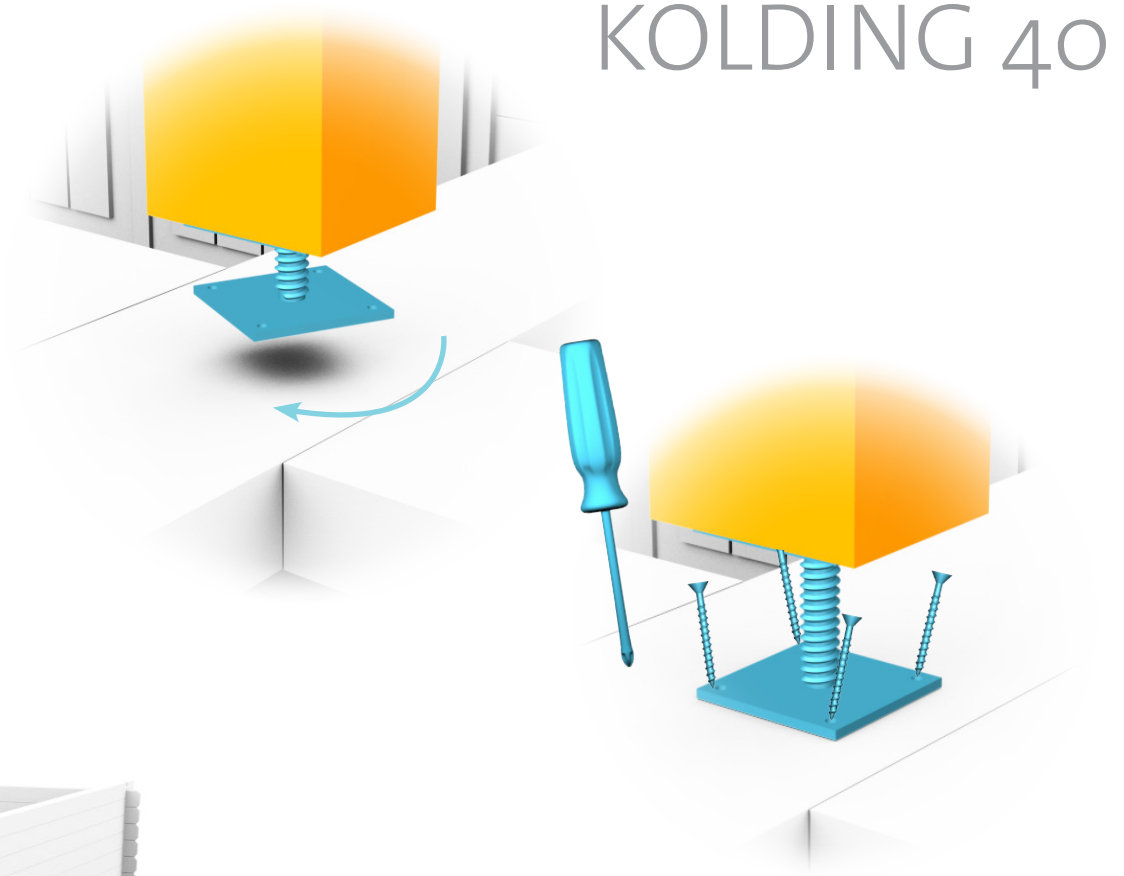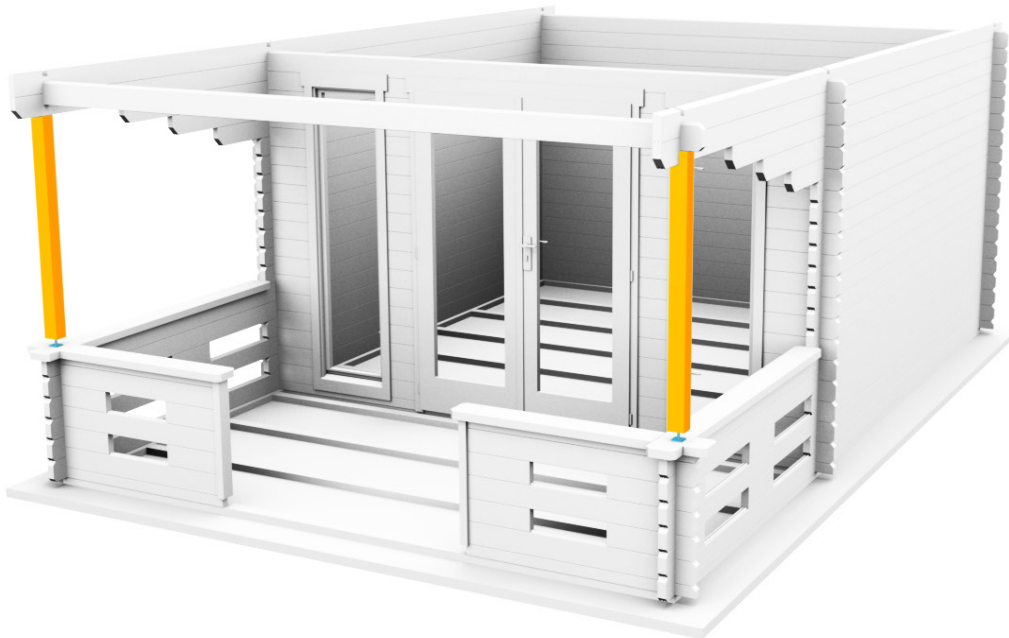

KOLDING 40


USE SCREWS TO ATTACH THE POST
FOOT TO THE HANDRAIL. 40%

INSTALL THE GABLES WITH LONG SCREWS TO THE WALL LOGS ON THE FRONT AND REAR WALLS.


6x140
× 6

Ø 5 mm

GABLE

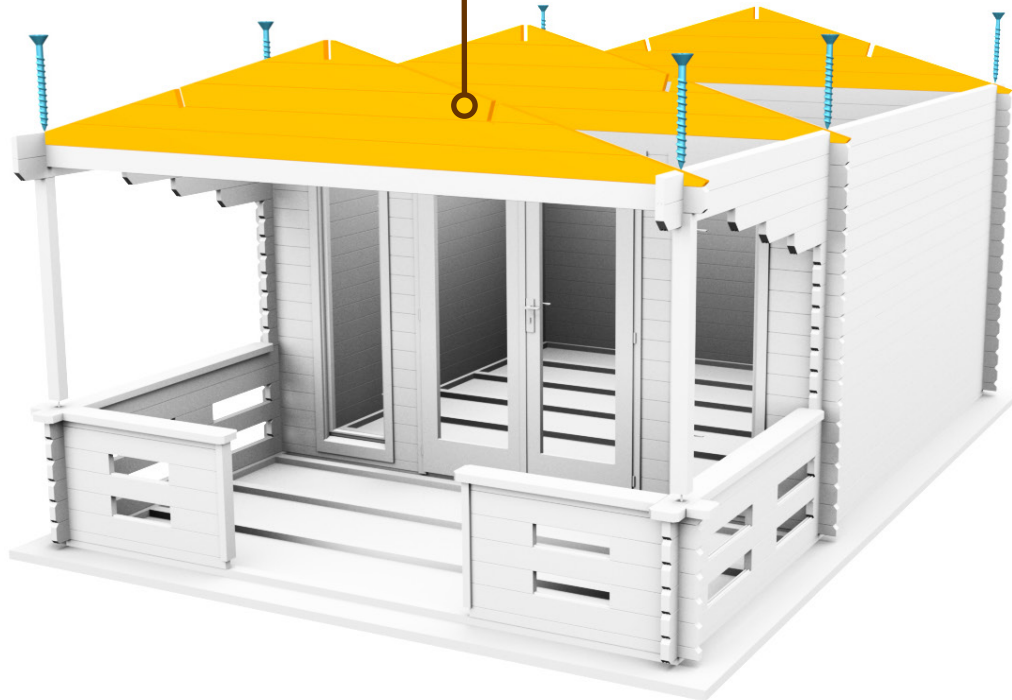



KOLDING 40

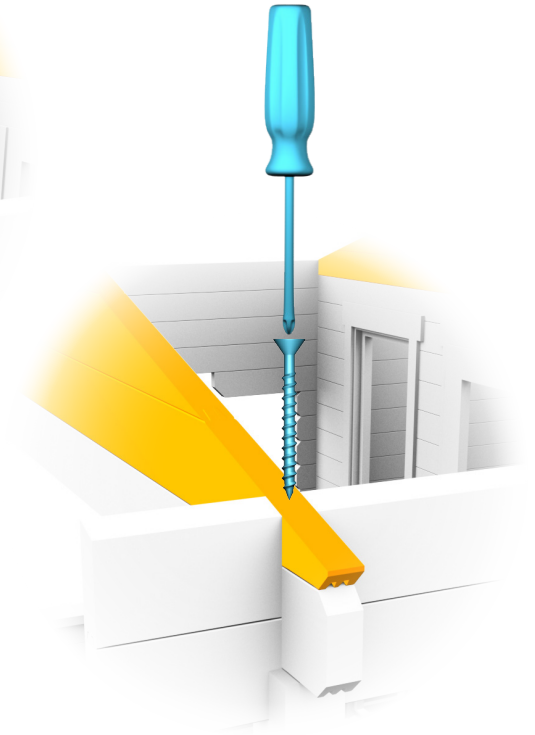


INSTALL THE **ROOF** PURLINS AND
ATTACH THEM WITH SCREWS.

6x140
× 9

Ø 5 mm

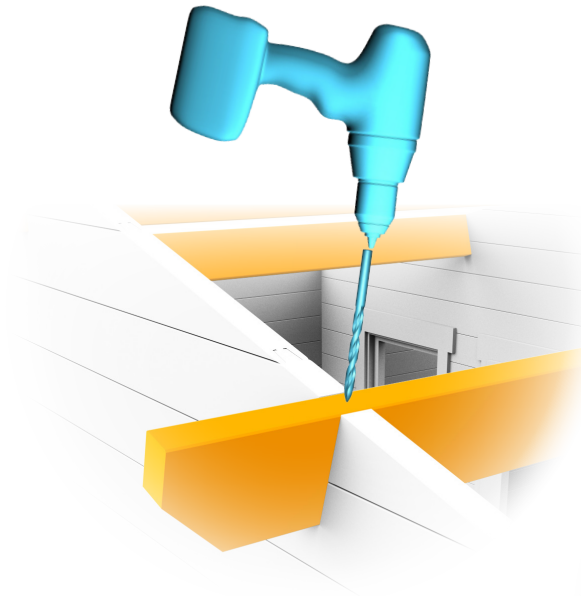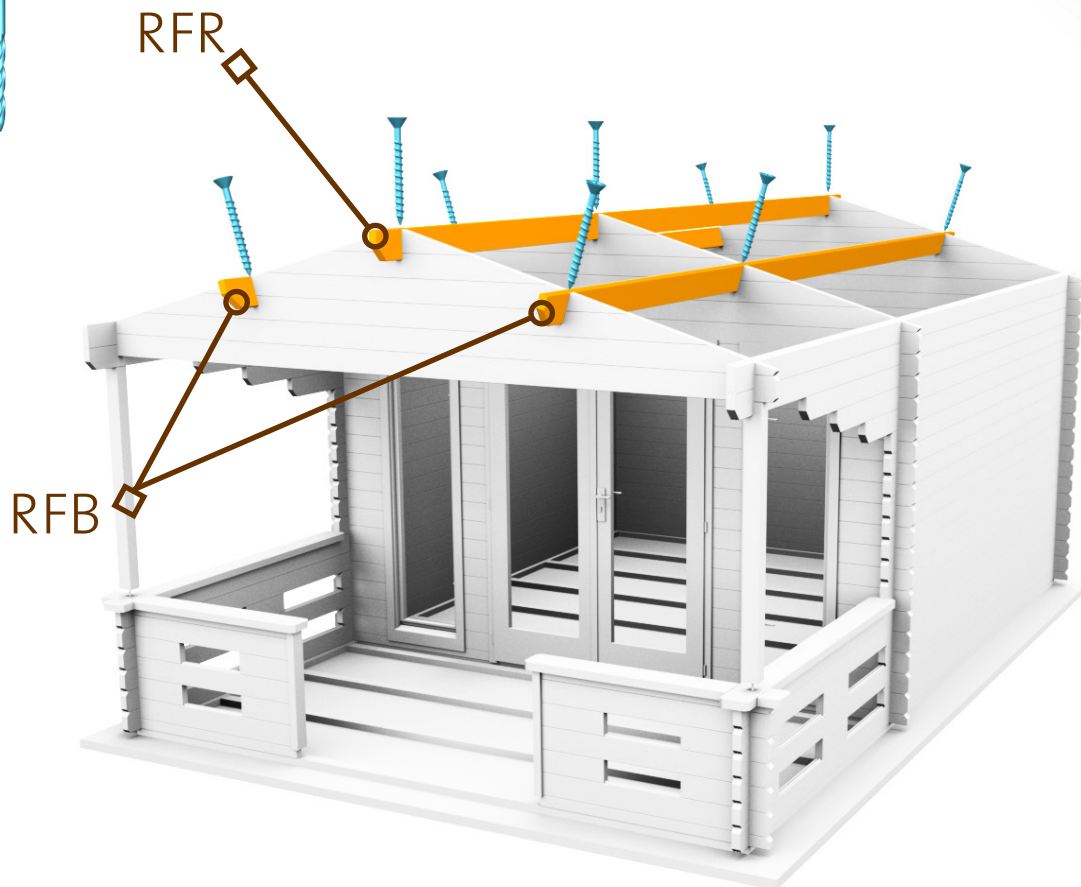


KOLDING 40

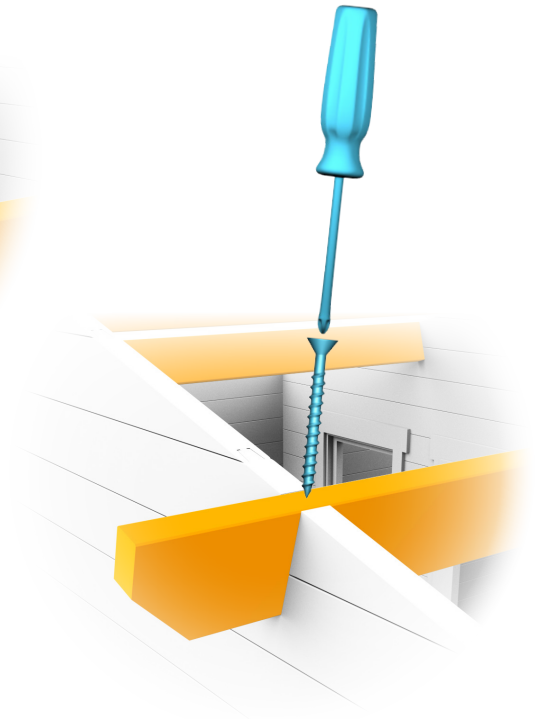


PLACE THE FIRST **ROOFBOARD** FLUSH WITH THE END OF THE **PURLINS** AND ATTACH WITH 6 SCREWS, 3 INTO **EACH** NEXT, SAW THE LAST **BOARD** TO MAKE IT FIT.

4x50
× 336

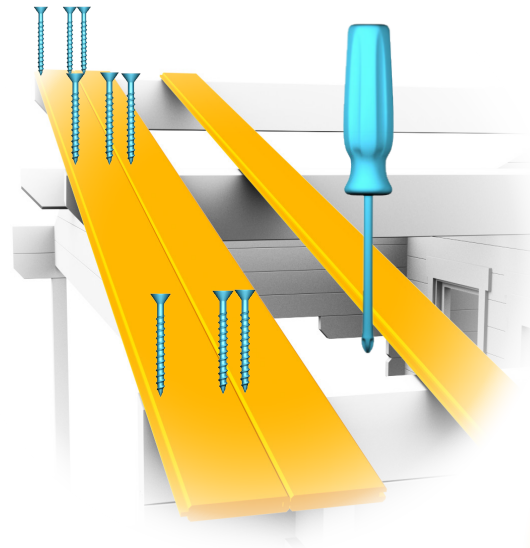


KOLDING 40

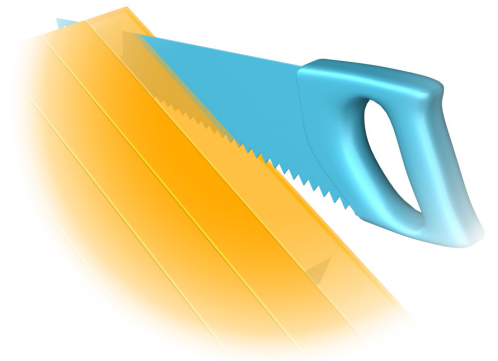

FOR THE FASCIA TRIMS INSERT
SCREWS AFTER EVERY 0,5 METERS.

KOLDING 40

4x40
× 52

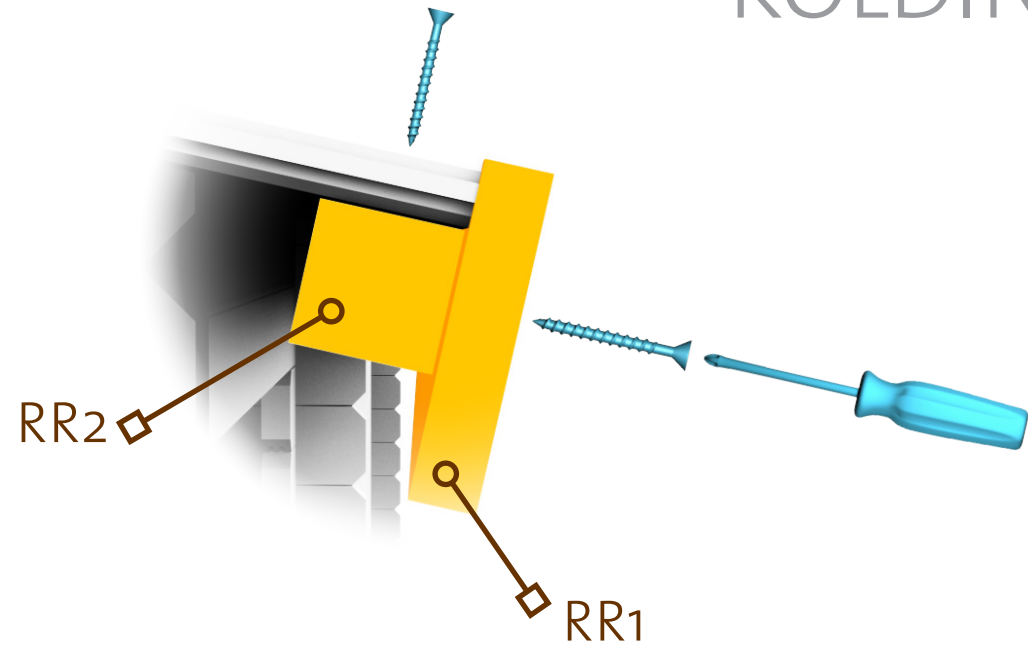


EAVES EDGES GO ON TOP
OF THE ROOFING*.



*(NOT INCLUDED)

4x40 × 32

Ø 3 mm

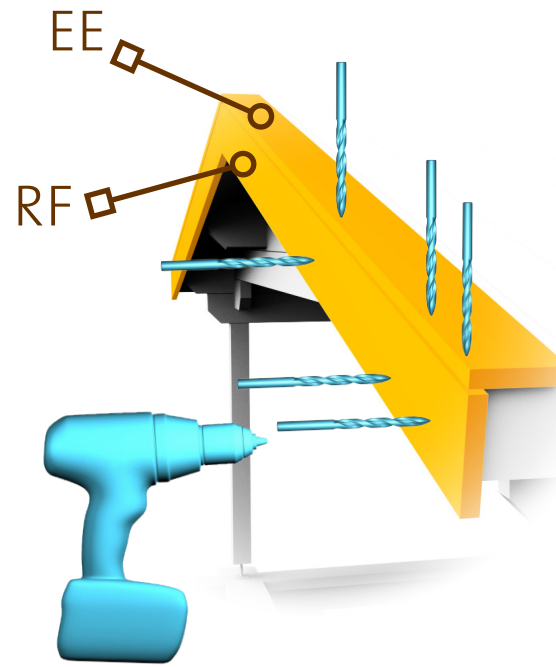



KOLDING 40

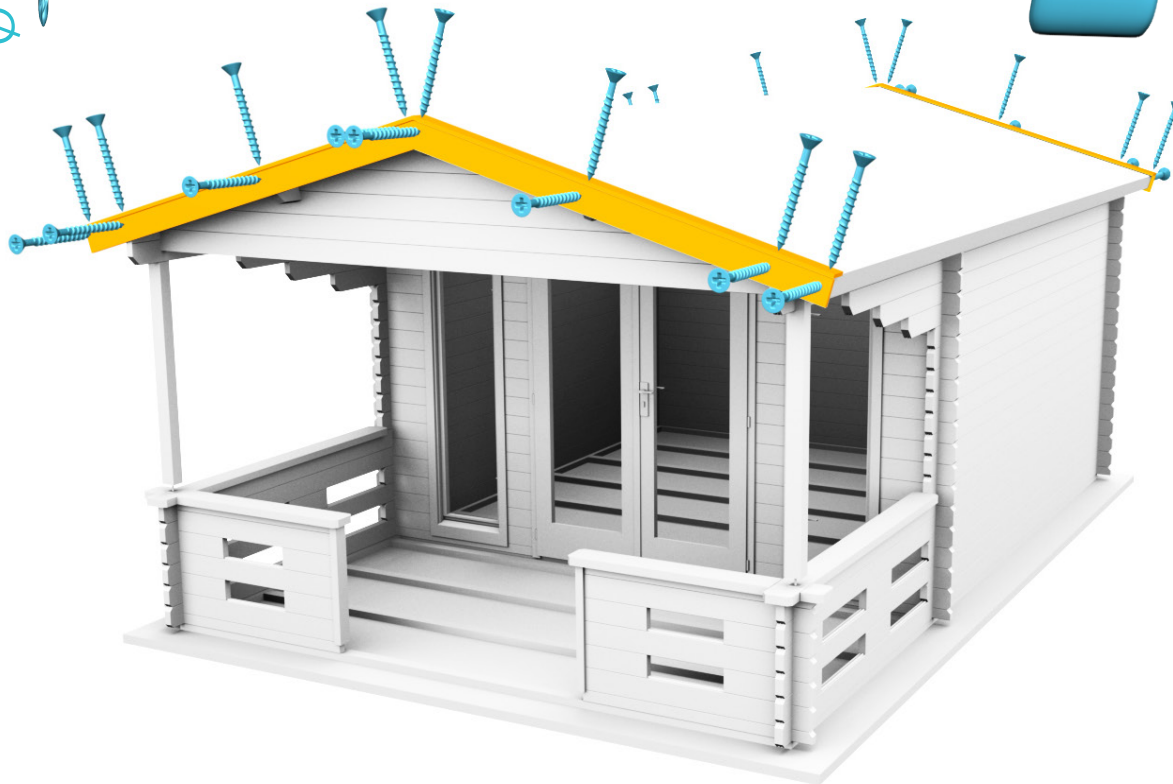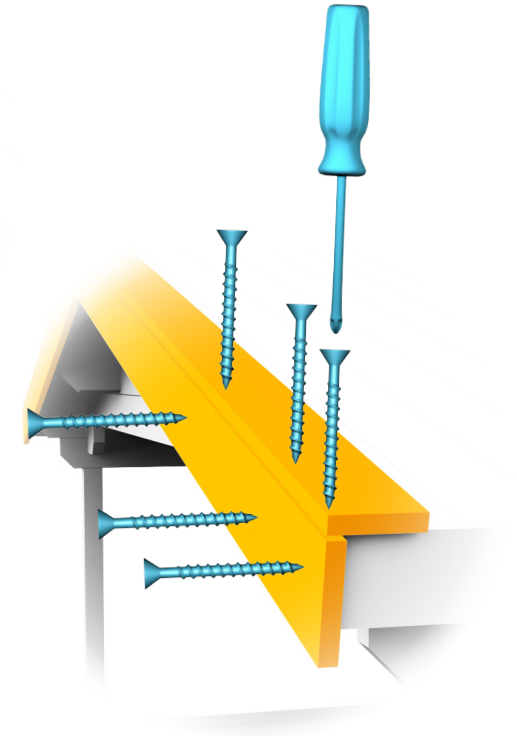

ATTACH ROMBS WITH SCREWS.


KOLDING 40

4x40
× 4
Ø 3 mm

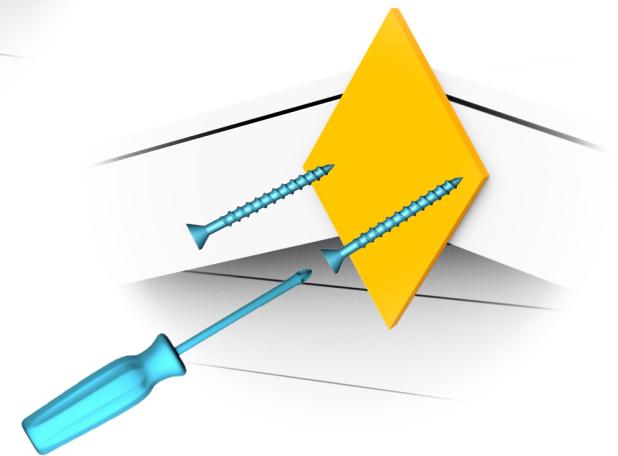
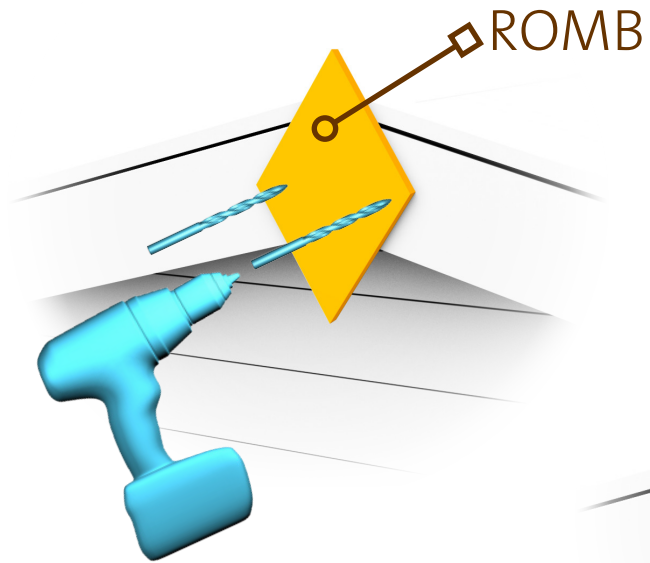


14 SCREWS INTO THE FIRST FLOORBOARD,
7 INTO EACH NEXT, SAW THE
LAST BOARD TO MAKE IT FIT.

4x40
× 238

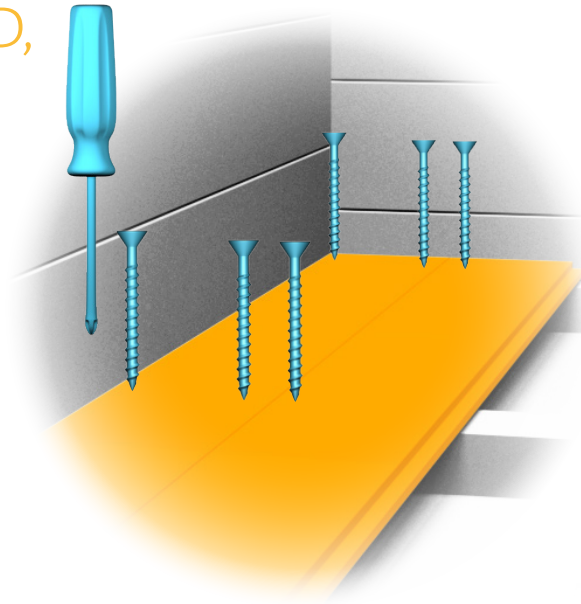


KOLDING 40

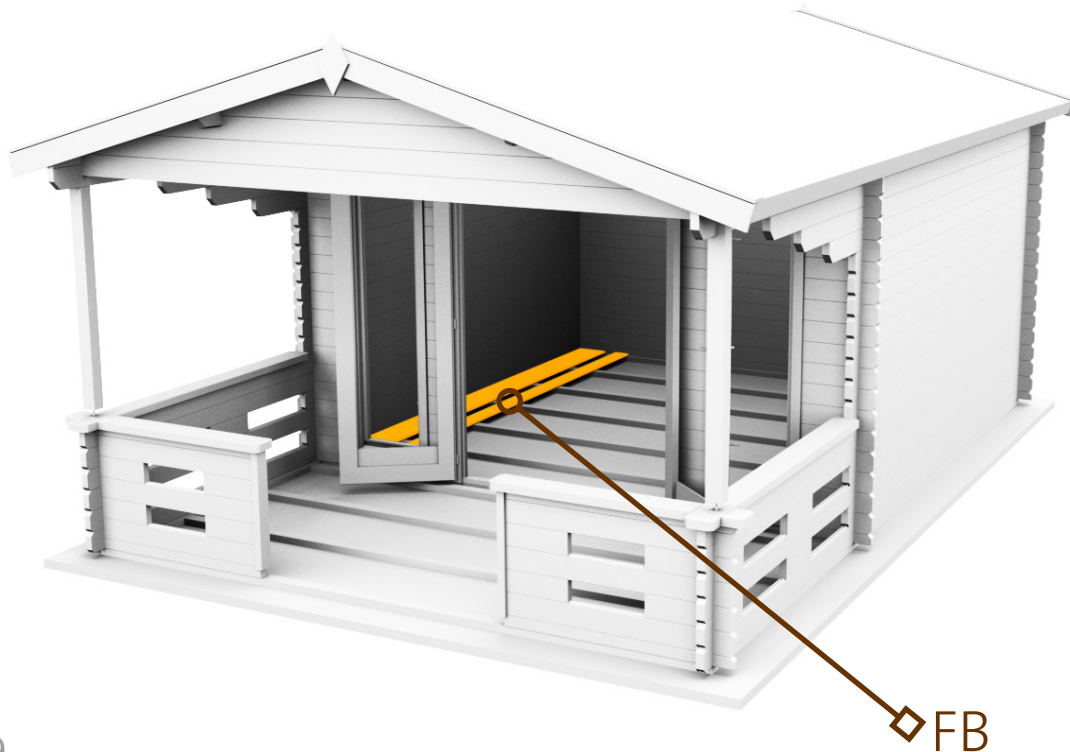
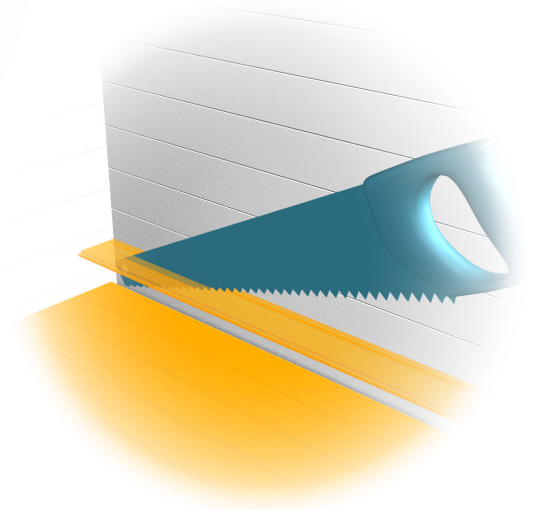


SAW THE **BASEBOARDS**
AND ATTACH WITH NAILS
AT **EVERY 0,5** METERS.

1,4×40
× 35

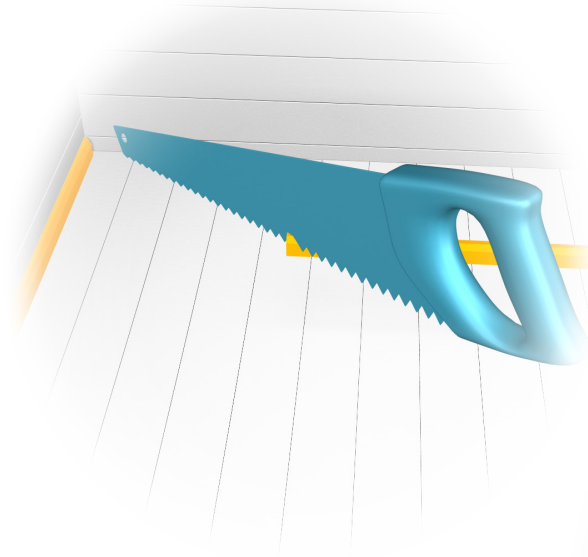





KOLDING 40

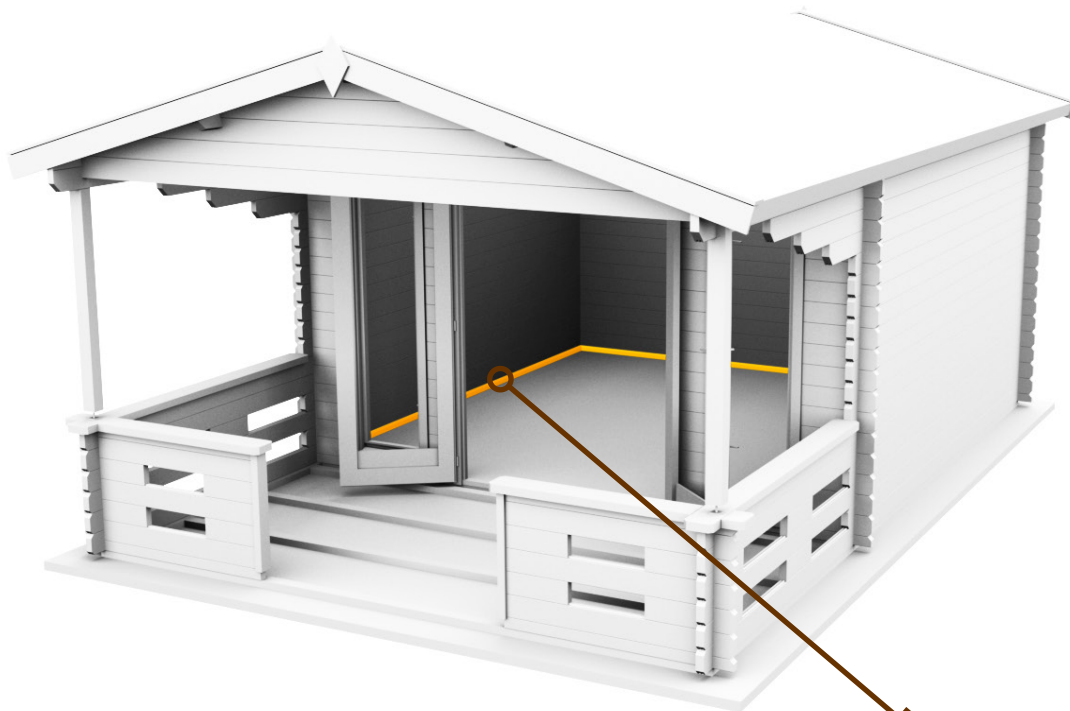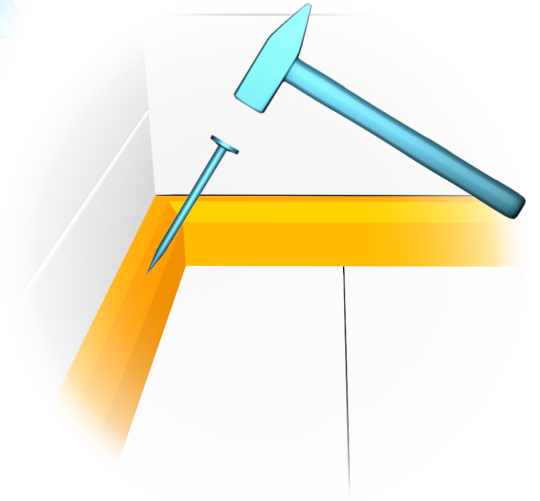


BB

WINDBOARD CONNECTS BOTTOM LOG WITH FIRTS LOG OF THE GABLE.

SAW THE WINDBOARD INTO THE RIGHT LENGTH. FOR THE TOP BOLT, DRILL 8MM HOLE THROUGH THE WINDBOARD.

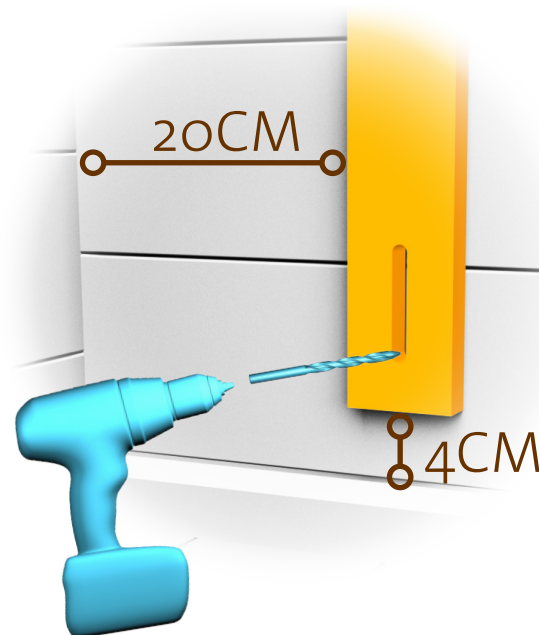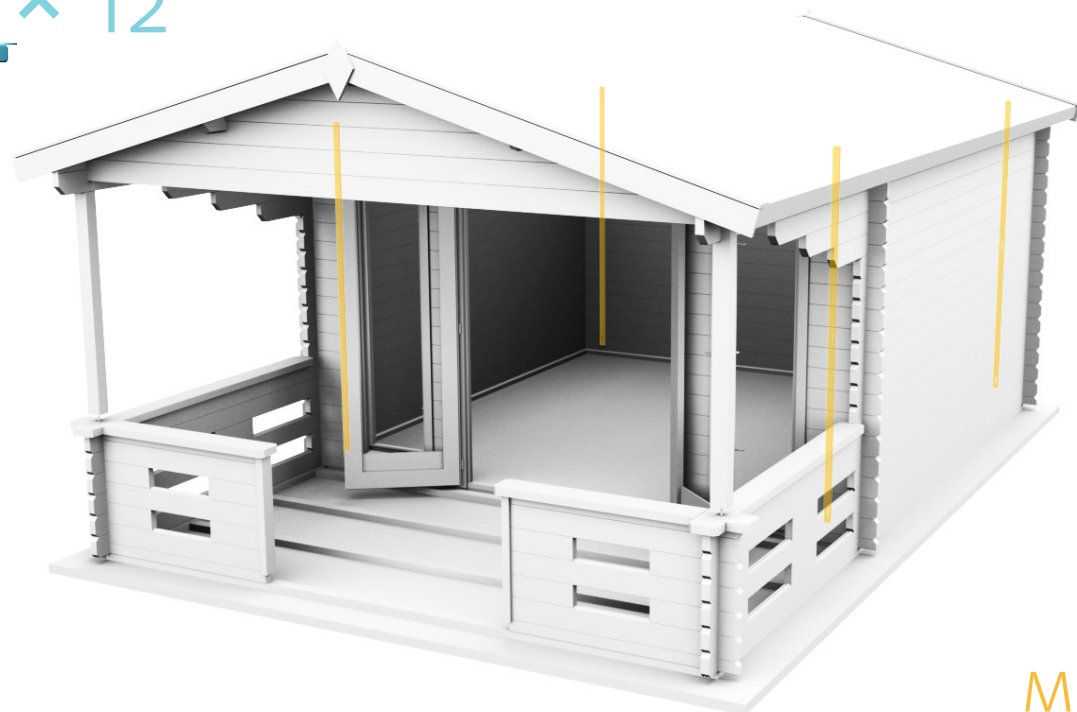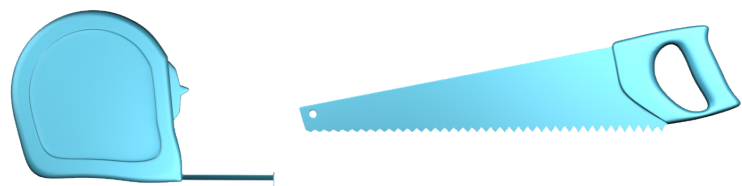

KOLDING 40

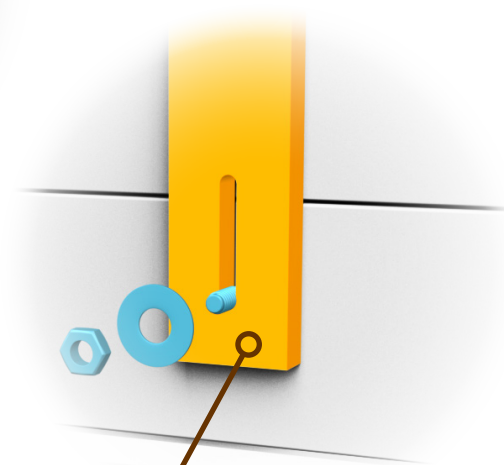


WINDBOARD



DRILL THROUGH THE WALL, HOLE MUST BE AT THE BOTTOM OF THE OVAL, ATTACH WITH BOLTS. 86%

8 SCREWS INTO EACH
TERRACE BOARD.

4x50
× 296

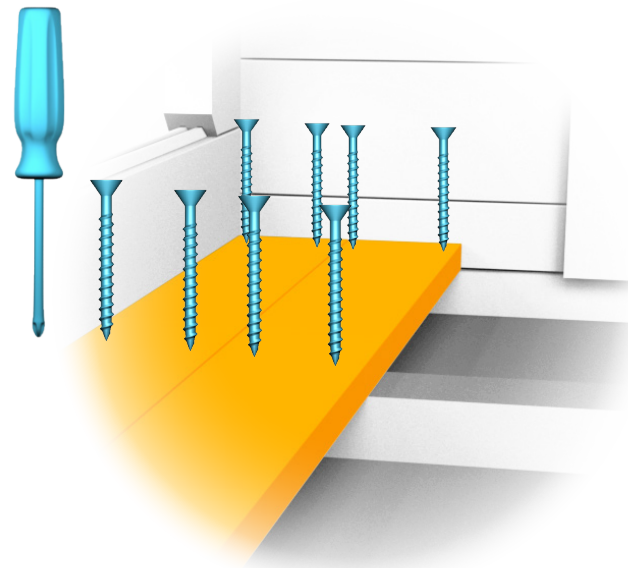




KOLDING 40

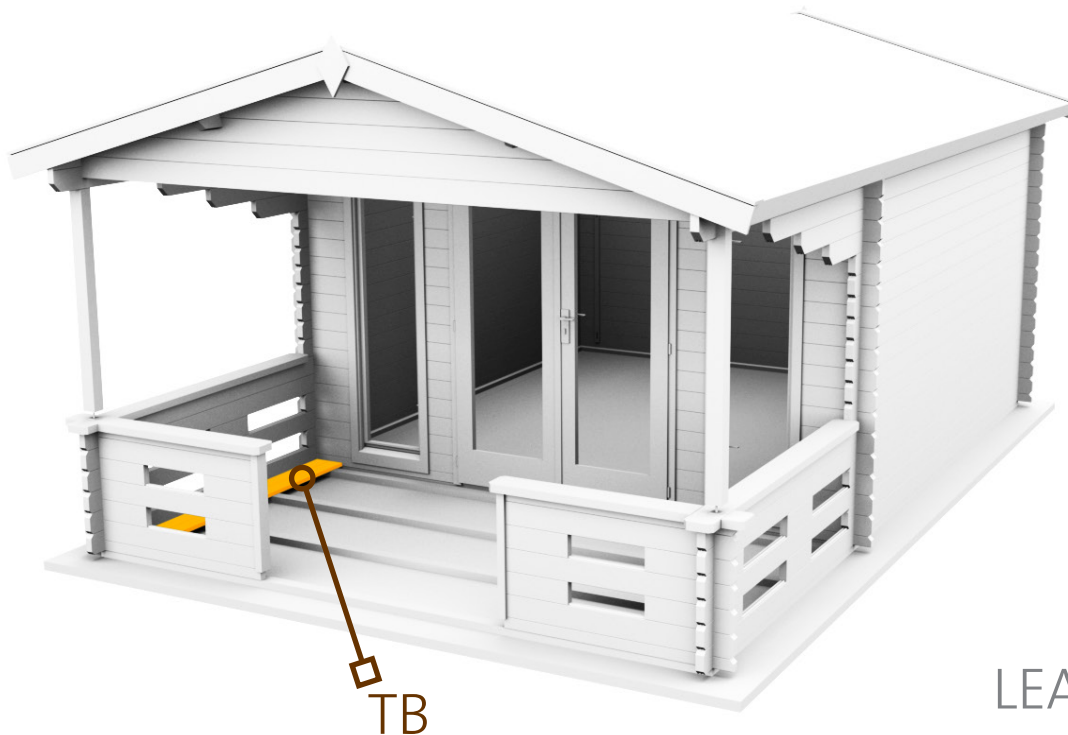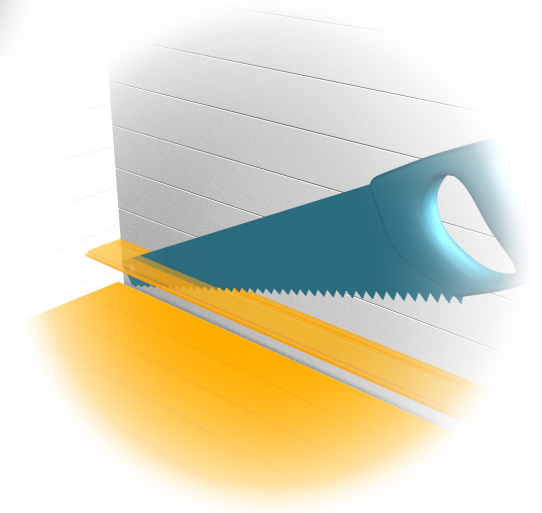

LEAVE 3MM GAP BETWEEN THE BOARDS.
SAW THE BOARDS IF NEEDED. 87%



IF DOOR IS TILTED,
PUSH THE DOOR FRAME SO
THAT ALL CORNERS ARE 90° .

KOLDING 40

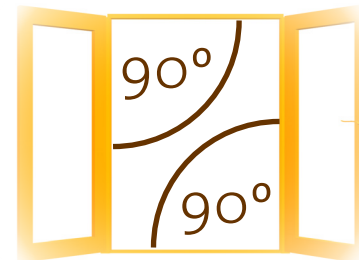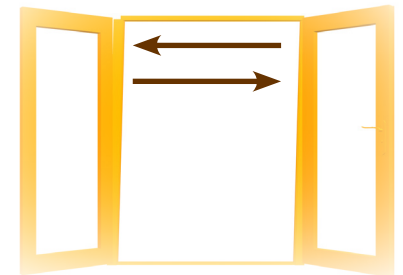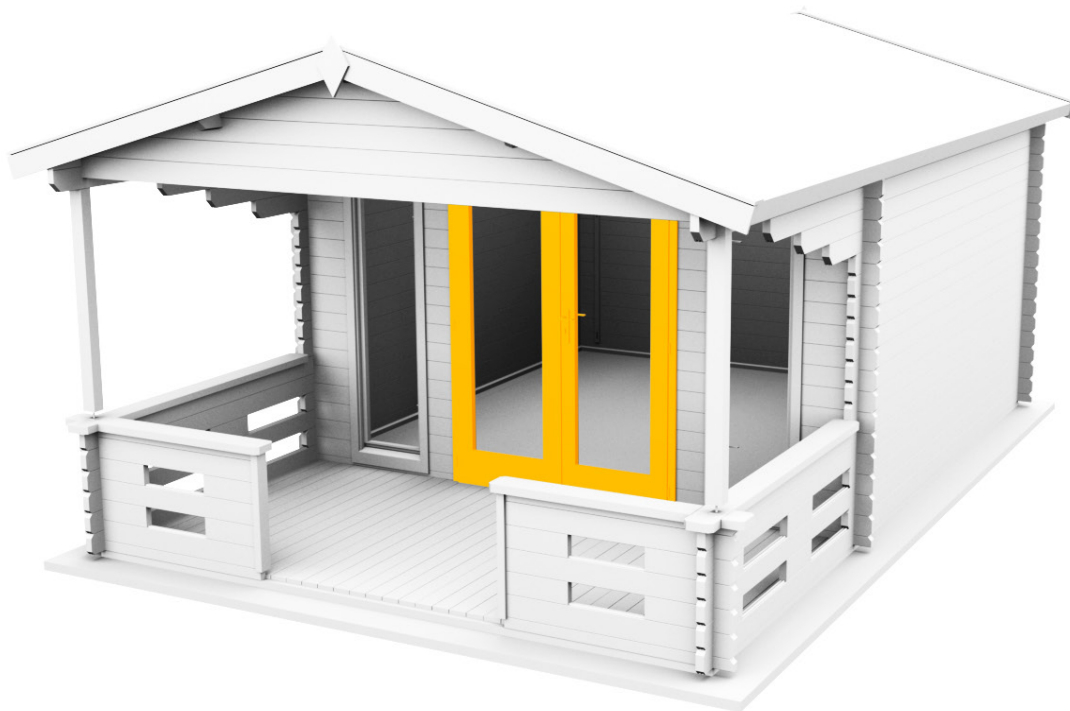

IF **DOORS** ARE IN DIFFERENT HEIGHTS
OR THERE IS A GAP **BETWEEN** THEM,
ADJUST 3 SCREWS ON DOOR HINGES.

KOLDING 40

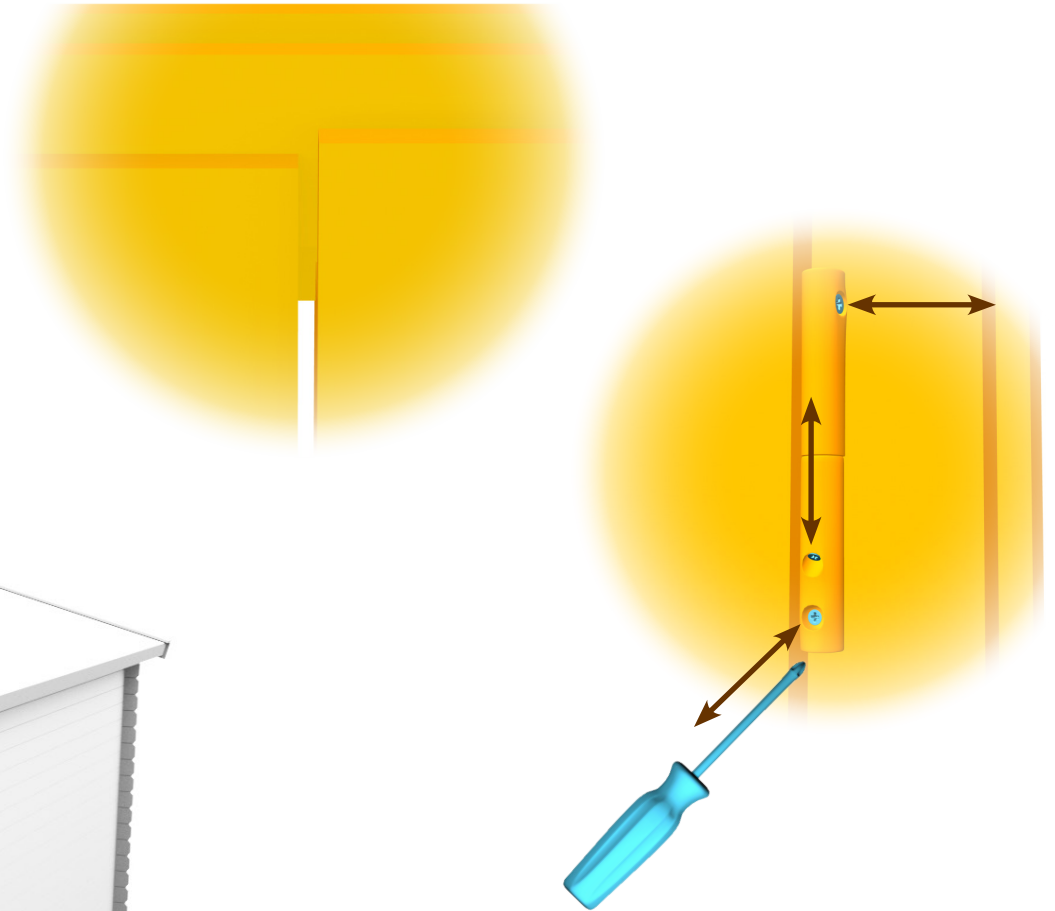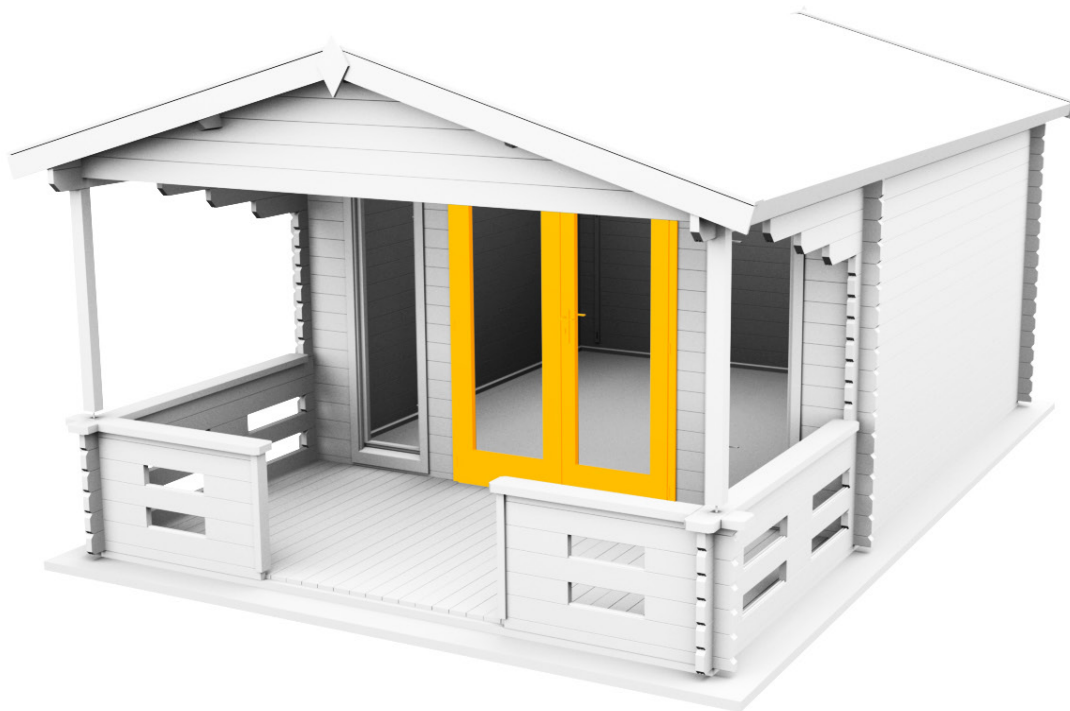

WHEN THE **HOUSE** IS ASSEMBLED, YOU SHOULD **COVER** THE TIMBER WITH **WOOD** PROTECTIVE SEAL, PAINT OR **STAIN** AS SOON AS POSSIBLE TO AVOID DETERIORATION TO THE **WOOD**.

KOLDING 40

